
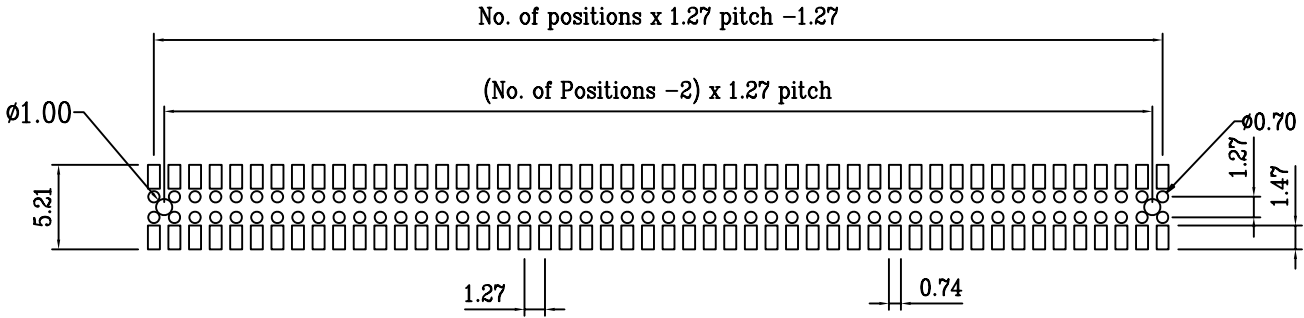



YA-V22P-2Xxx-LF
LEADFREE
RoHS Compliant

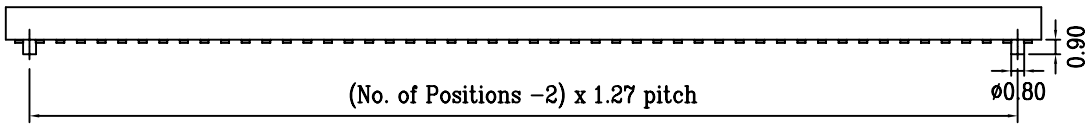

Recommended P.C.B. Layout

SPECIFICATIONS

- * Current Rating : 1 Amps
- * Insulator resistance: 5000 Megohms min.
- * Dielectric withstanding: AC 500 V
- * Operating Temperature: -40° - +105°C
- * Max Processing Temp: 230° for 30~60 seconds
(260° for 10 seconds)
- * Contact Material: Phosphor bronze
- * Housing: L.C.P (UL 94 V-0)



PART NO. YA-V22P-2Xxx

DWG NO. YA-V22P-2Xxx

FILE NO. 872-XXX2202-X

CHECKED BY CY

DRAWING BY

TOLERANCES ARE

.X ± 0.35
.XX ± 0.25
.XXX ±

AWG

DESCRIP TION: 1.27X1.27mm SOCKET LOW PROFILE
2.2mm SMD TYPE

煜倫股份有限公司

UNIT / mm

SCALE 1 : 1

PROJECTION

AREA

REVISIONS

HK

DATE