

SPECIFICATIONS

Current Rating: 7A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66,UL94V-2

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
MF-PDX-1X03	8.40	13.80
MF-PDX-1X04	12.60	18.00
MF-PDX-1X05	16.80	22.20


RoHS Compliant

TOLERANCES ARE


MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1:1
 DATE

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

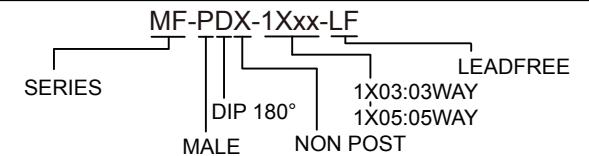

煜倫股份有限公司

www.morethanall.com

SIZE A4 PROJECTION

DESCRIPTION: 4.20mm PITCH 180° WAFER, MINI-FIT