

MATERIALS:

INSULATOR:P.B.T.30%GLASS FIBER,UL94V-0

CONTACT MATERIAL:BRASS OR PHOSPHOR BRONZE,GOLD FLASH OVER NICKEL

ELECTRICAL:

CURRENT RATING:1AMP DC







INSULATION RESISTANCE:3000MΩ MIN.

CONTACT RESISTANCE:30mΩ MAX.


DIELECTRIC WITHSTANDING:500V AC

OPERATING TEMPERATURE:-40°C~+105°C

TERMINATED WITH 1.27mm PITCH FLAT RIBBON CABLE.

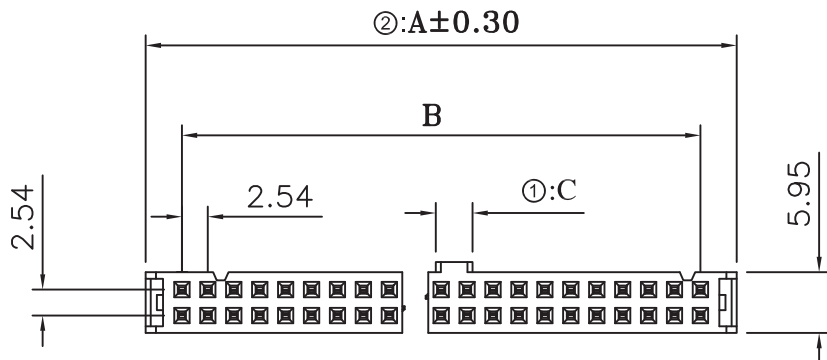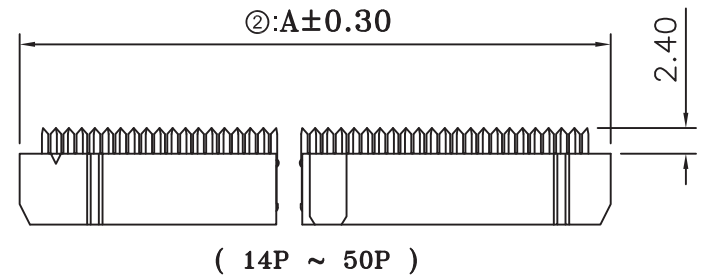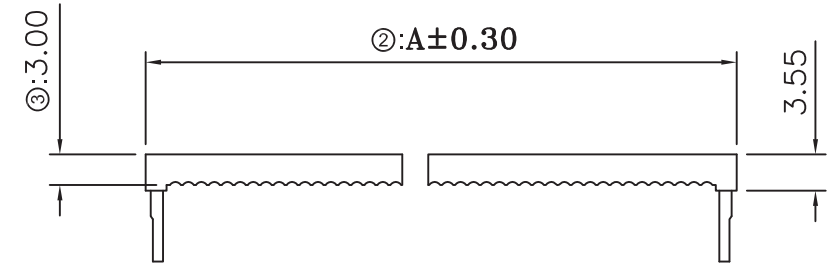

| DIMENSION | | | |
|-----------|-------|-------|------|
| CONTACT | A | B | C |
| 06P | 12.18 | 05.08 | 1.90 |
| 08P | 14.72 | 07.62 | 1.90 |
| 10P | 17.26 | 10.16 | 3.60 |
| 12P | 19.80 | 12.70 | 3.60 |
| 14P | 22.34 | 15.24 | 3.60 |
| 16P | 24.88 | 17.78 | 3.60 |
| 18P | 27.42 | 20.32 | 3.60 |
| 20P | 29.96 | 22.86 | 3.60 |
| 24P | 35.04 | 27.94 | 3.60 |
| 26P | 37.58 | 30.48 | 3.60 |
| 30P | 42.66 | 35.56 | 3.60 |
| 34P | 47.74 | 40.64 | 3.60 |
| 40P | 55.36 | 48.26 | 3.60 |
| 50P | 68.06 | 60.96 | 3.60 |

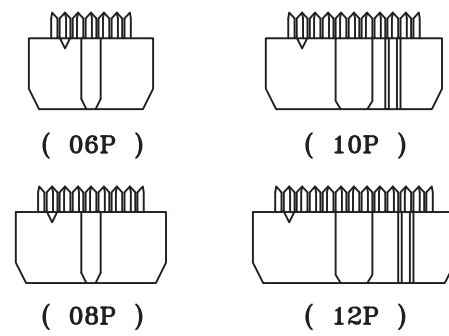

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

DRAWING BY CY
CHECKED BY GENIUS
UNIT/ mm SCALE 1:1
DATE


X.±
.X±
.XX±
.XXX±
ANG±

www.morethanall.com

SIZE A4 PPROJECTION




ORDER INFORMATION

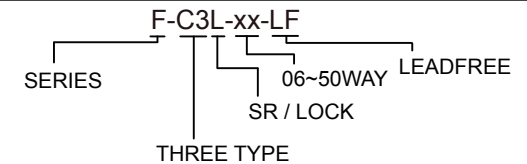

DESCRIPTION:

| CONTACTS | A | B | CONTACTS | A | B |
|----------|-------|-------|----------|-------|-------|
| 10P | 13.70 | 13.00 | 26P | 34.00 | 33.20 |
| ①: 14P | 18.78 | 18.08 | ③: 30P | 39.08 | 38.28 |
| 16P | 21.30 | 20.60 | 34P | 44.48 | 43.58 |
| 20P | 26.38 | 25.60 | 40P | 52.10 | 51.20 |
| 24P | 31.46 | 30.68 | | | |

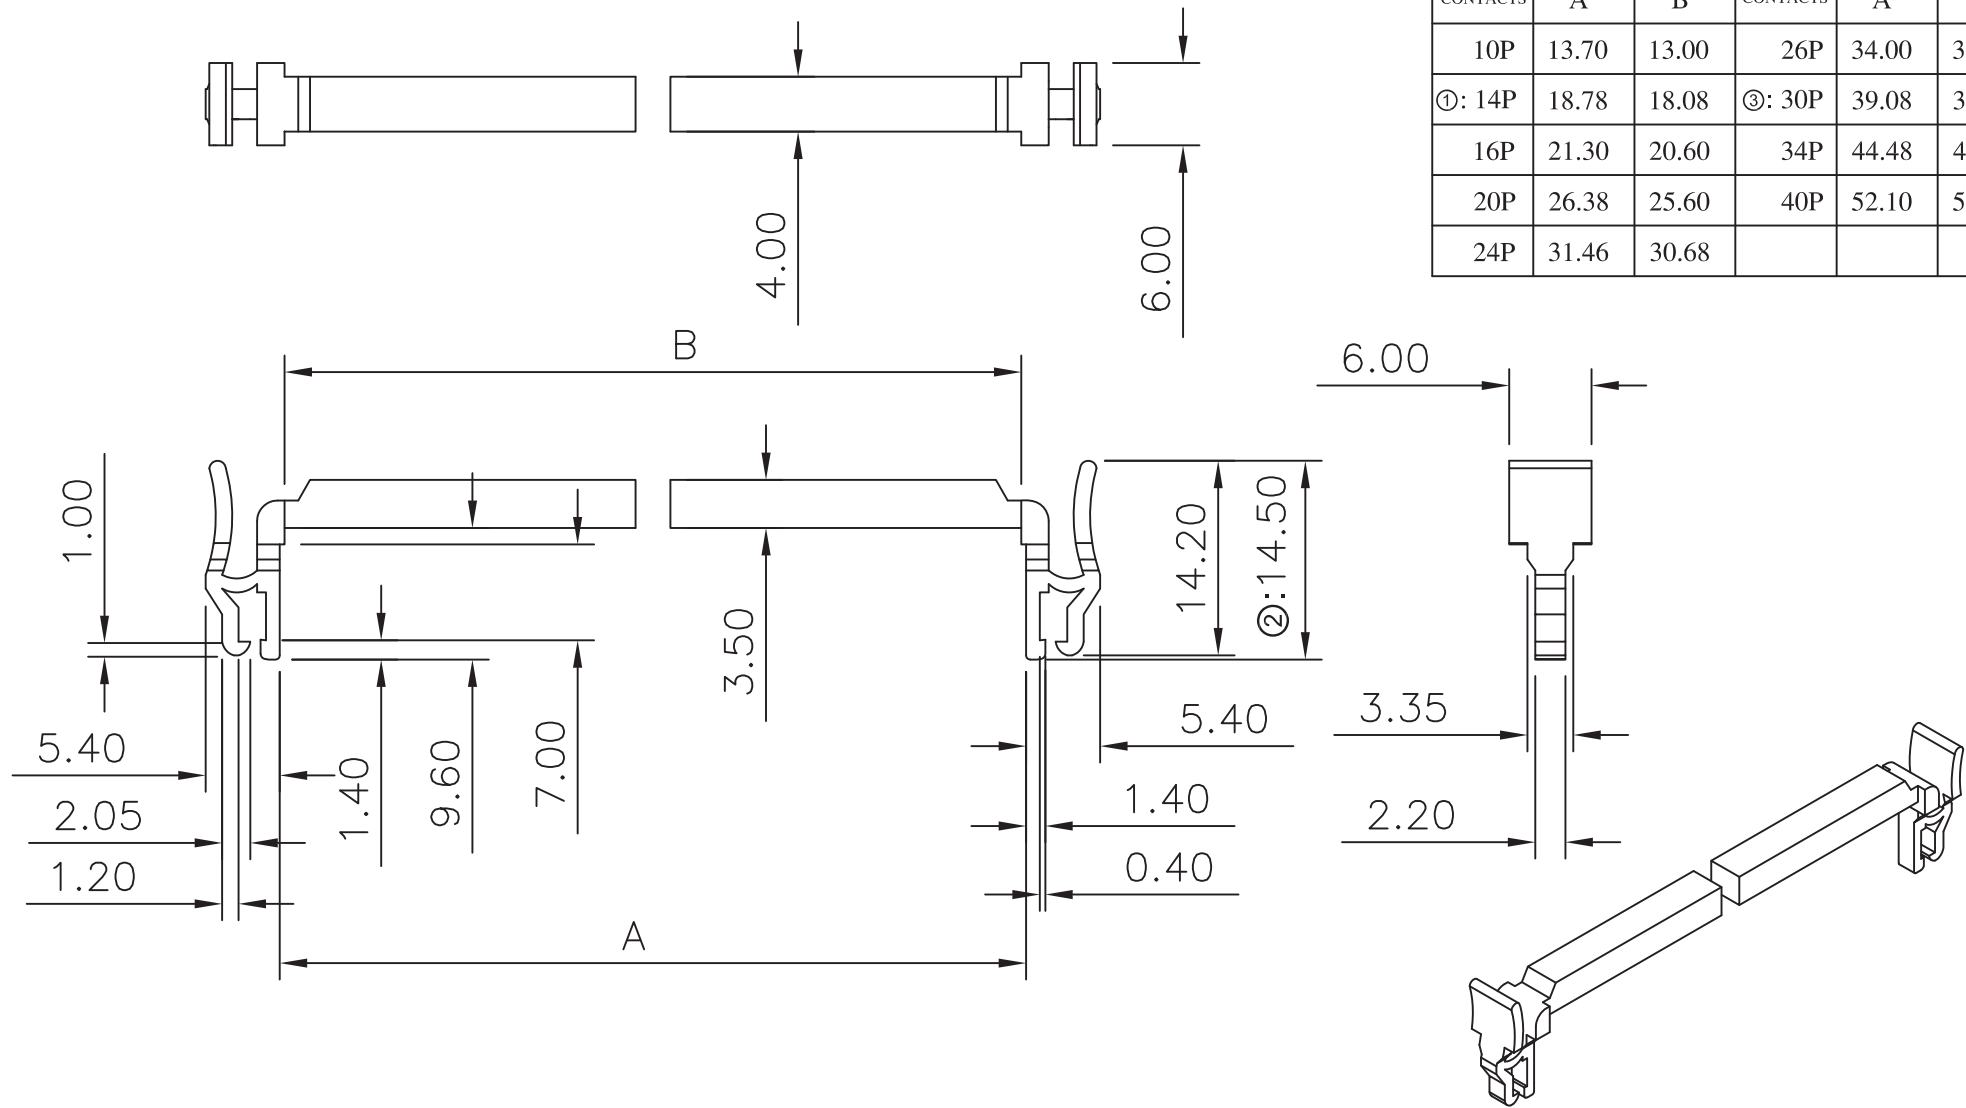

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com


RoHS Compliant

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1:1
DATE
SIZE A4 PPROJECTION

TOLERANCES ARE
X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

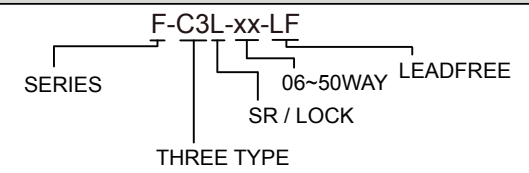

DESCRIPTION: