



RECOMMENDED P.C.B LAYOUT

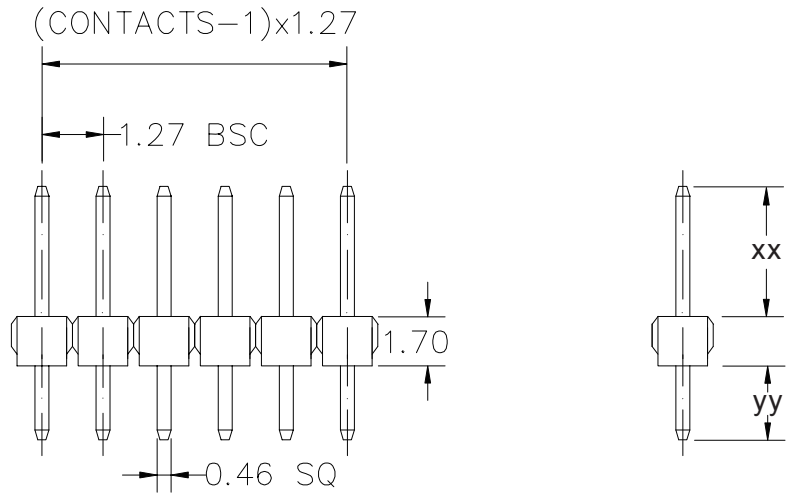

**MATERIAL**  
 HOUSING : THERMOPLASTIC UL94V-0  
 CONTACT : COPPER ALLOYS

**SPECIFICATION**  
 CURRENT: 1A  
 OPERATING TEMPERATURE: -45°C TO +105°C  
 CONTACT RESISTANCE : 20 MILLIOHMS MAX  
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN  
 WITHSTANDING VOLTAGE : AC 500V RMS



**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES


煜倫股份有限公司

www.morethanall.com

**RoHS Compliant**

DRAWING BY CY		TOLERANCES ARE X. ± .X ± 0.20 .XX ± 0.10 .XXX ± ANG ±
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	P PROJECTION	

**ORDER INFORMATION**

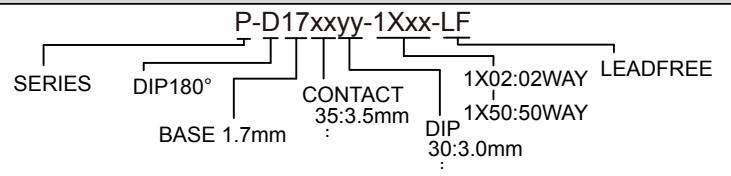

DESCRIPTION: