


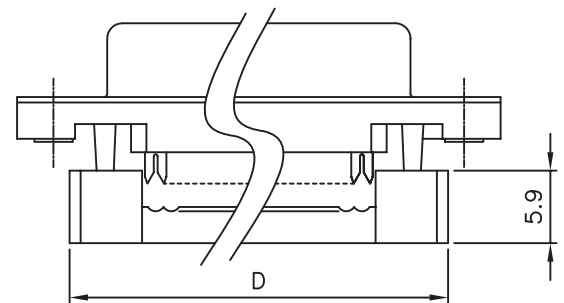


SPECIFICATION
MATERIAL
 Insulator: Polyester resin and glass fiber reinforced (UL 94V-0)
 Contacts: Phosphor bronze
CONTACT PLATING
 Underplate: 50u" Nickel
 Contact area: 1u"~30u" Selective Gold
 Solder tails area: 100u" Tin/Lead
ELECTRICAL
 Operation voltage: 250 VAC max.
 Current rating: 3 Amps max.
 Contact resistance: 15 mohms max.
 Insulation resistance: 3000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC / minute
 Operating temperature: -55°C TO +105°C



DFM-S-xx-LF
 LEADFREE
 RoHS Compliant

POSITION	A	B	C	D
DFM-S-09	16.30	25.00	30.8	22.4
DFM-S-15	24.60	33.30	39.2	30.8
DFM-S-25	38.30	47.10	53.1	44.5
DFM-S-37	54.80	63.50	69.4	61.4

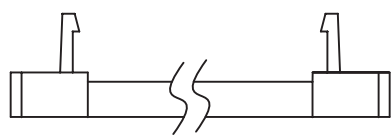

MORETHANALL
 CONNECTORS
 ASSEMBLIES

PART NO. DFM-S-xx		CHECKED BY CY		TOLERANCES ARE		DESCRIPTION: D SUB IDC FOR FLAT RIBBON CABLE				
DWG NO. DFM-S-xx		DRAWING BY		.X ± 0.3 .XX ± 0.2 .XXX AWG						
FILE NO.		PROJECTION								
UNIT / mm	SCALE 1:1					AREA	REVISIONS	HK	DATE	

焜倫股份有限公司