





1 2 3 4 5 6 7 8 9 0

J
I
H
G
F
E
D
C
B
A

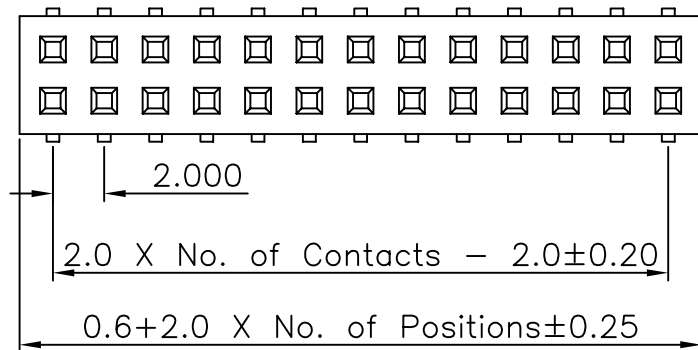

S-B50-2Xxx-LF
LEADFREE
RoHS Compliant

Specifications
 Current Rating: 2Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C
 Materials
 Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 NYLON-6T
 All materials must be GP materials

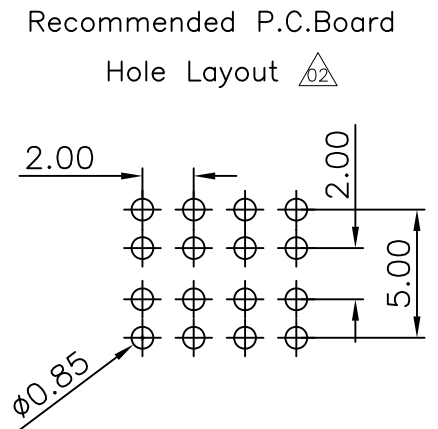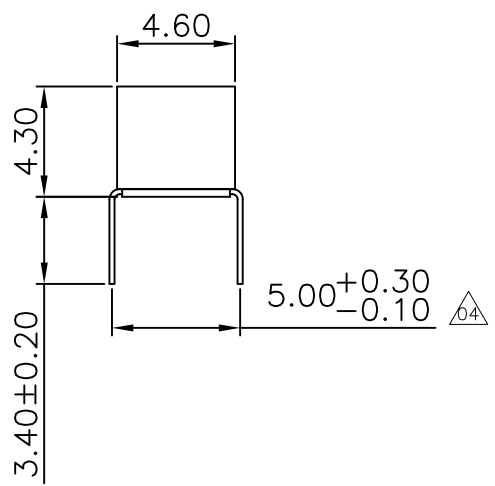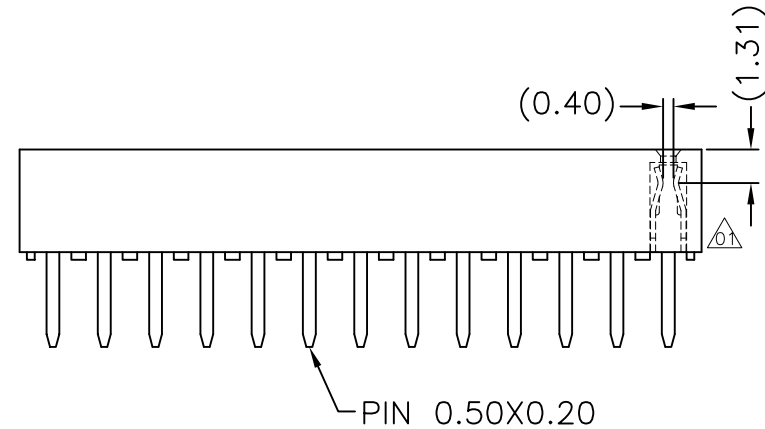

MORETHANALL
CONNECTORS
ASSEMBLIES
煜倫股份有限公司

PART NO. S-B50-2Xxx
 DWG NO. S-B50-2Xxx
 FILE NO.
 UNIT / mm SCALE 1:1

CHECKED BY CY
 DRAWING BY
 PROJECTION

TOLERANCES ARE
 .X ± 0.2
 .XX ± 0.1
 .XXX ±
 AWG

DESCRIPTION:
 AREA

2.00 FEMALE HEADER
 DUAL ROWS DIP TYPE BASE 4.30H
 REVISIONS HK DATE