

**SPECIFICATIONS**

**Material**

Insulator: PBT, glass reinforced, rated UL 94V-0

Contact: Phosphor Bronze

**Electrical**

Current Rating: 1 Amp






Contact Resistance: 30 mΩ max.

Insulation Resistance: 3000 MΩ min.

Dielectric Withstanding Voltage: 500V AC for 1 minute

Operating Temperature: -40°C to +105°C

**Mating Suggestion:** C15, C16, C17 & C18 series.

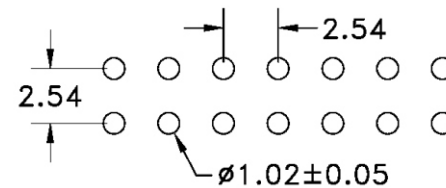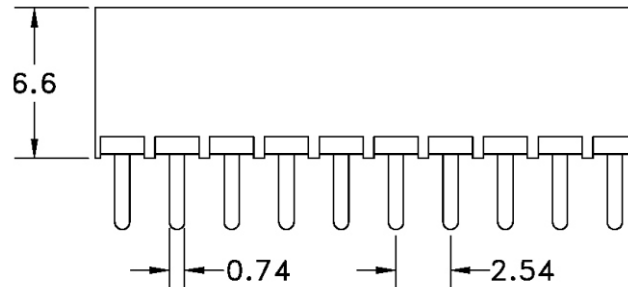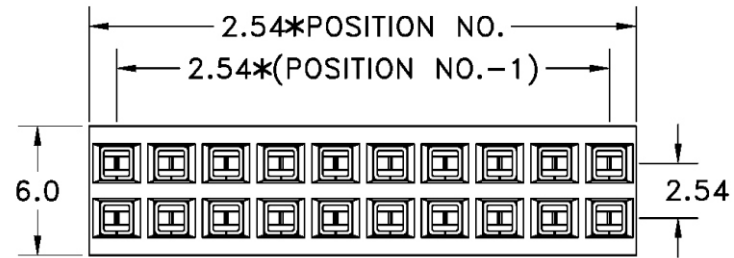

RECOMMENDED P.C.B LAYOUT

**RoHS Compliant**

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±


.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



**ORDER INFORMATION**

F-D66-2Xxx-LF  
 SERIES | LEADFREE  
 2X02:04 WAY  
 2X40:80 WAY  
 HIGH 6.6mm  
 DIP 180°

DESCRIPTION: