



Current Rating: 2 Amps  
 Insulator Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms max  
 Dielectric Withstanding: 500 V AC  
 Operating Temperature: - 40° ~ +105° C  
 Max Processing Temp: 230° C for 60 seconds  
 260° C for 10 seconds  
 Contact Material: Copper Alloy  
 Insulator Material: High Temperature Plastic,UL 94V-0

Finish: Tin,Gold Plated  
 Standard:Gold Flash all over

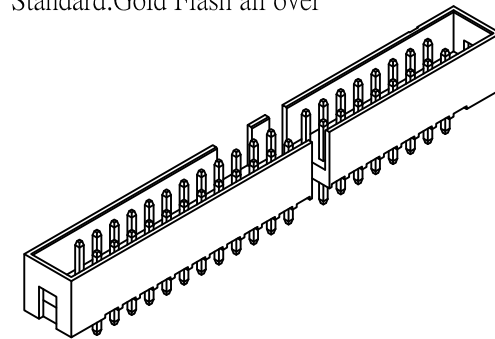

Recommended P.C. Board Hole Layout

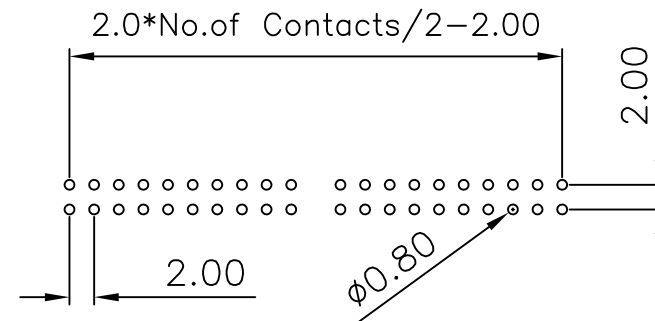

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PJECTION

X, ±  
 .X ± 0.30  
 .XX ± 0.20  
 .XXX ± 0.10  
 ANG ±



ORDER INFORMATION

MB-D3L-xxx-LF  
 SERIES | LEADFREE  
 006-068 WAY  
 IDC 3 PCS+LOCK  
 DIP 180°

DESCRIPTION: