



RECOMMENDED PCB LAYOUT

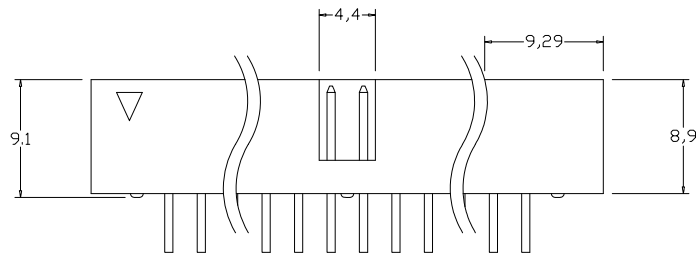

SPECIFICATIONS:

Material:

Insulator :PBT , glass rated UL 94V-0

Insulator Color :Black

Contacts: Brass

Plating :Gold Flash over Nickel underplate overall

Electrical:

Operating voltage: 250V AC max

Current rating: 1 Amp max

Contact resistance: 20 mohms max

Insulation resistance: 5,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC / minute

Mechanical:

Mating durability: 500 cycles min

Temperature Rating:

Operating temperatures: -55 to +105

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

B-R-40E20-LF
SERIES | LEADFREE
EMPTY 20 PIN
40 WAY
DIP 90°

DESCRIPTION: