
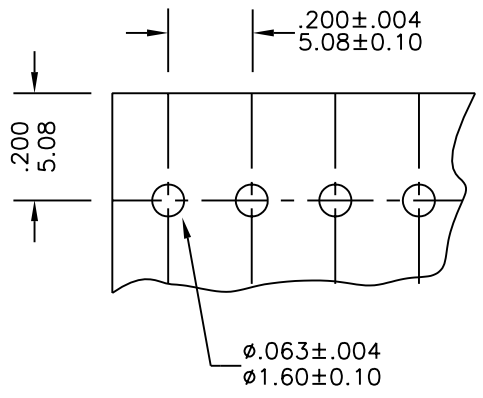


FEATURES:

- . 2-20 Circuits
- . Housing, UL 94V-2 Nylon 6/6, Natural
- . Designed for parallel and perpendicular board stacking, connection
- . Mates with .045"[1.14mm] square pins or round pins
- \* FOR CIRCUIT SIZES 4 THROUGH 20 ADD .200" OR

SPECIFICATIONS:

- . Current rating: 7A AC, DC
- . Voltage rating: 250V AC, Maximum
- . Temperature range: -40°C ~ +105°C
- . Contact resistance: Initial Value/10mΩ max. After environmental testing /20mΩ max.
- . Insulation resistance: 5000 MΩ min
- . Withstand Voltage: 1500V AC/minute
- . Applicable PC board thickness: .063"[1.6mm]

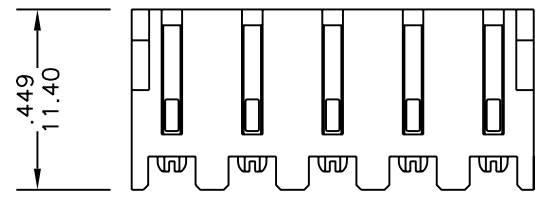

Recommended Hole Dimensions

Dimensional Information

Circuits	Dim.A ± .008 0.20	Dim.B ± .008 0.20
2	.200 5.08	.400 10.16
3	.400 10.16	.600 15.24
4	.600 15.24	.800 20.32

UNIT: INCH  
MM



煜倫有限公司

PART NO. LKX-S-xx		CHECKED BY CY		TOLERANCES ARE .X ± .XX ± .XXX ± AWG	DESCRIP TION: (5.08mm) Center P.C.Board Connectors	AREA	REVISIONS	HK	DATE
DWG NO. LKX-S-xx		DRAWING BY							
FILE NO.		PROJECTION							
UNIT / mm	SCALE 1:1								