

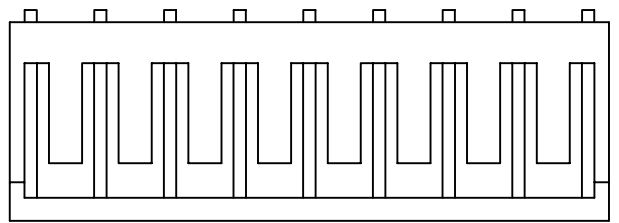


SPECIFICATIONS

CURRENT RATING: 3A AC,DC
 VOLTAGE RATING: 250V AC,DC
 TEMPERATURE RANGE: -25°C ~ +85°C
 (INCLUDING TEMPERATURE RISE)
 INSULATION RESISTANCE: 1,000M MIN.
 WITHSTAND VOLTAGE: 800V AC/MINUTE
 APPLICABLE WIRES: AWG #28 ~ #22
 APPLICABLE PC BOARD THICKNESS
 SHAPE A CONTACT:.047(1.2)
 MATERIAL AND FINISH:
 HOUSING:NYLON 66 UL94V-0
 CONTACTS:PHOSPHOR BRONZE,TIN PLATING

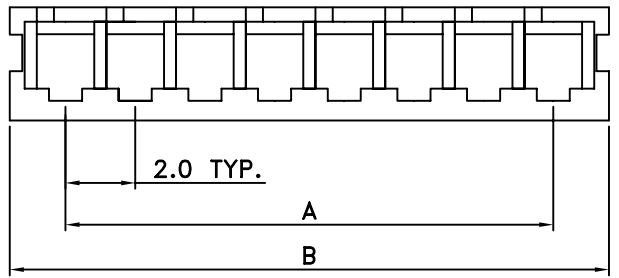

CIRCUITS	DIM.A	DIM.B
2	2.00	5.20
3	4.00	7.20
4	6.00	9.20
5	8.00	11.20
6	10.00	13.20
7	12.00	15.20
8	14.00	17.20
9	16.00	19.20
10	18.00	21.20
11	20.00	23.20
12	22.00	25.20
13	24.00	27.20
14	26.00	29.20
15	28.00	31.20
16	30.00	33.20

SAN-H-xx-LF
 LEADFREE
 RoHS Compliant



PART NO. SAN-H-xx		APPROVED BY CY		TOLERANCES ARE X. ± 0.20 XX. ± 0.15 XXX. ± 0.10 AWG	DESCRIP TION: 2.0MM HOUSING	AREA	REVISIONS	HK	DATE
DWG NO. SAN-H-xx		DRAWING BY							
FILE NO.		PROJECTION							
UNIT / mm	SCALE 1:1								

煜倫股份有限公司