

## Material & Finish

### SHELL:

Steel  
Zinc plated, Tin plated  
or Nickel plated steel

### PIN CONTACT:

Phosphor Bronze  
Gold plated

### INSULATOR:

PBT & Glass-fibre reinforced  
UL-94-V0

### CURRENT RATING:

1 Amp

### DIELECTRIC STRENGTH:

1000V for one minute


### INSULATOR RESISTANCE:

1000MΩ Min. (at 500V DC)

### TEMPERATURE:

-55° C to +105° C

Positions	A	B	C	D
14	12.96	25.2	36.0	43.9
24	23.76	36.0	46.8	54.7
36	36.72	48.9	59.7	67.7
50	51.84	64.1	74.9	82.8

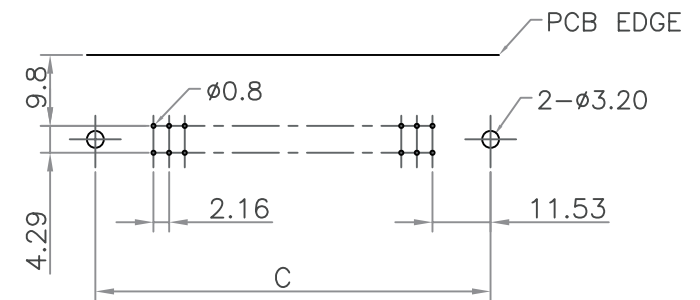

P.C.B. LAYOUT

### RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE


SIZE A4

PJECTION

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



### ORDER INFORMATION

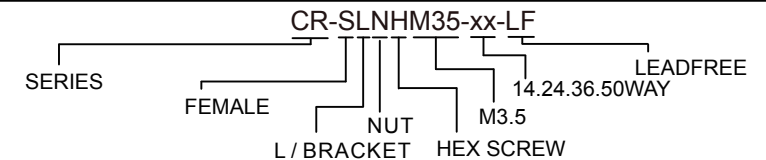

DESCRIPTION: CENTRONIC P.C.B. R/A TYPE FEMALE  
RIVET L SHAPE APPOSE IEEE-488 HEX SCREW