



NOTE: 1. ALL DIMENSIONS ARE IN MILLIMETERS, BRACKETED DIMENSIONS ARE IN INCHES.
 2. GENERAL TOLERANCES: 10mm OVER - ± 0.20 mm.
 10mm BELOW - ± 0.10 mm.

SW-SRxx-xx-LF
 LEADFREE
 BL: BLUE COLOR
 RD: RED COLOR

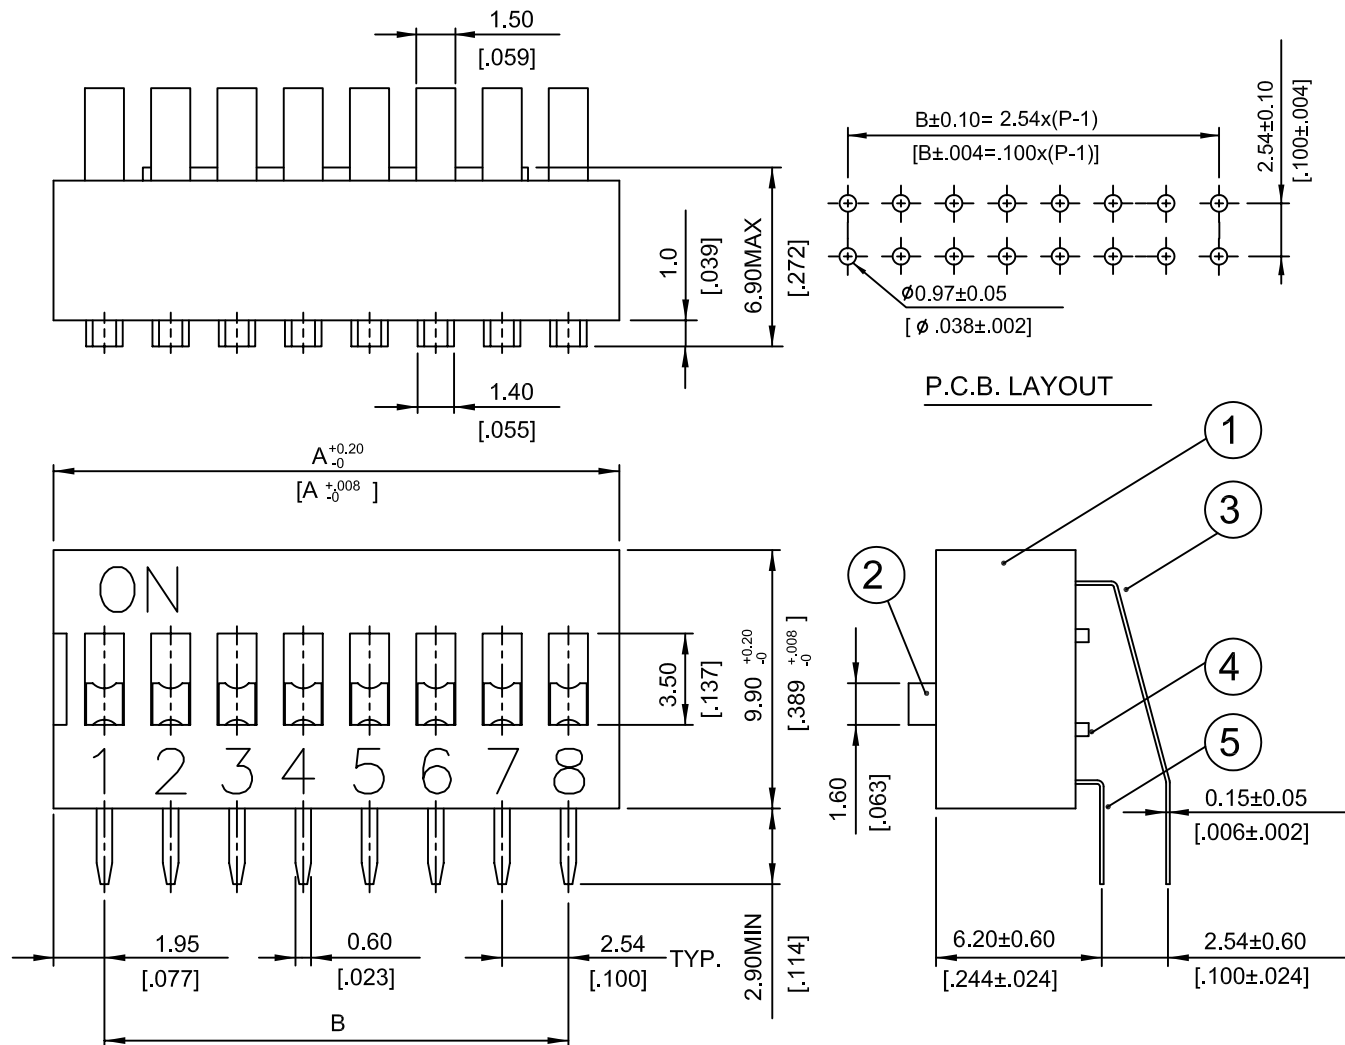

SW-SRxx-12	12	31.84[1.254]	27.94[1.100]
SW-SRxx-10	10	26.76[1.054]	22.86[.900]
SW-SRxx-09	9	24.22[.954]	20.32[.800]
SW-SRxx-08	8	21.68[.854]	17.78[.700]
SW-SRxx-07	7	19.14[.754]	15.24[.600]
SW-SRxx-06	6	16.60[.654]	12.70[.500]
SW-SRxx-05	5	14.06[.554]	10.16[.400]
SW-SRxx-04	4	11.52[.454]	7.62[.300]
SW-SRxx-03	3	8.98[.354]	5.08[.200]
SW-SRxx-02	2	6.44[.254]	2.54[.100]
PROD. NO.	NO. OF POS.	DIM. A	DIM. B

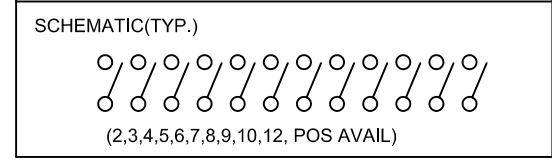

RoHS Compliant

MORETHANALL
 CONNECTORS
 ASSEMBLIES

煜倫股份有限公司

PART NO. SW-SRxx-xx		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX \pm .XXX \pm AWG	DESCRIP TION: RIGHT ANGLE TYPE DIP SWITCH
DWG NO. SW-SRxx-xx		DRAWING BY			
FILE NO.		PROJECTION		AREA	REVISIONS
UNIT / mm	SCALE 1:1			HK	DATE