


**NOTE:**

**1.SPECIFICATIONS:**

- Current rating:1A AC,DC
- Voltage rating:1300V AC,DC
- Contact Resistance:20m Ω max
- Insulation Resistance:1000M Ωin
- Withstanding Voltage:3800V AC/minute
- Temperature range:-25°C to +85°C




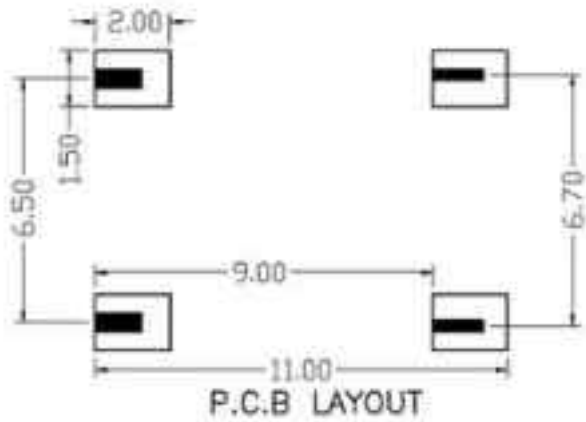


BHS-WR-02-LF  
LEADFREE  
RoHS Compliant

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

煜倫股份有限公司

PART NO. BHS-WR-02		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:			
DWG NO. BHS-WR-02		DRAWING BY						
FILE NO.		PROJECTION		AREA	REVISIONS	HK	DATE	
UNIT / mm	SCALE 1:1							

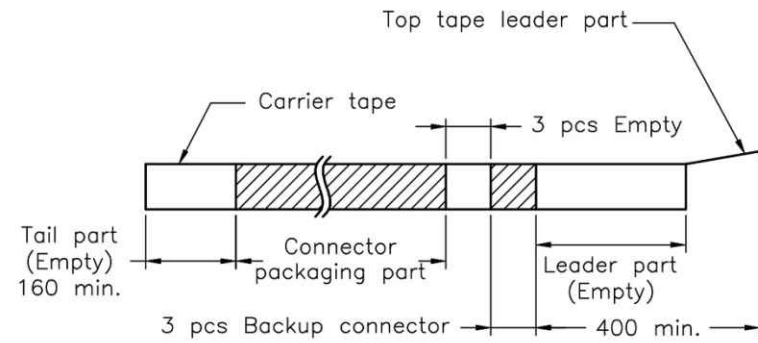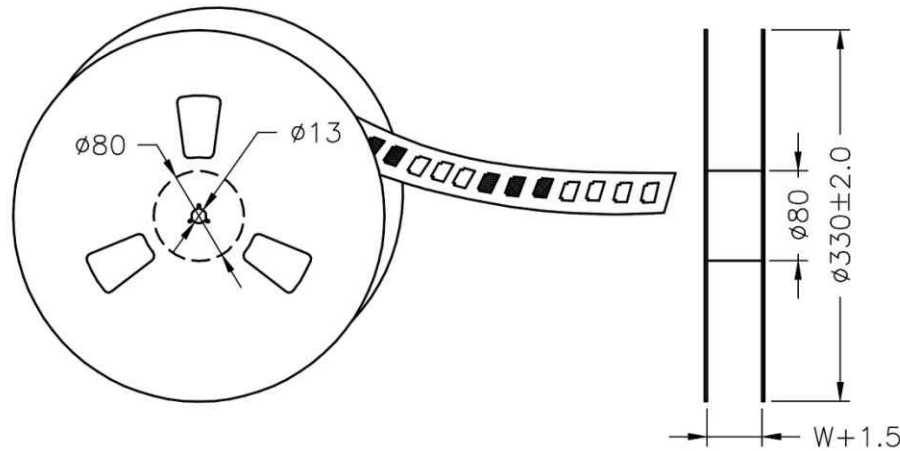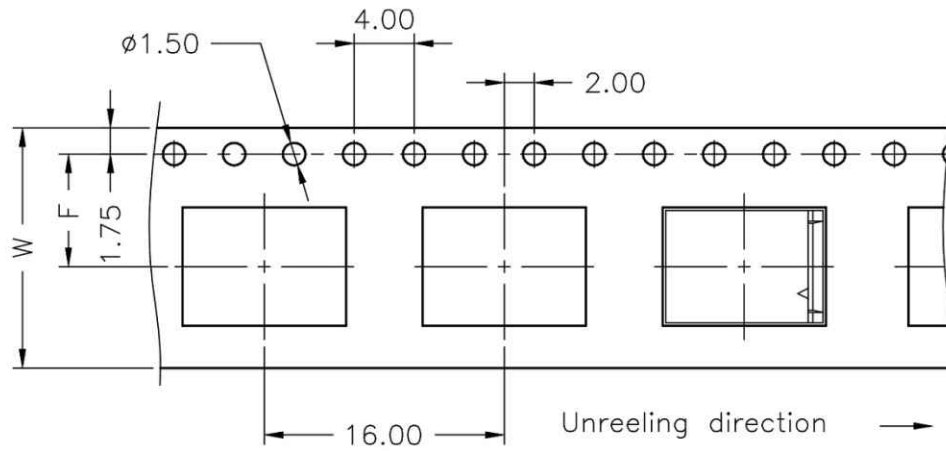

Number of Contacts	W±0.3	F±0.1	Q'ty/Reel
02P	16	7.50	1,000

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

PART NO. BHS-WR-02

DWG NO. BHS-WR-02

FILE NO.

煜倫股份有限公司

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ±  
.XX ±  
.XXX ±  
AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE