

## SPECIFICATIONS

CURRENT RATING: 3 AMP

INSULATION RESISTANCE: 1000M OHMS MIN.

DIELECTRIC WITHSTANDING: 600V AC/DC




CONTACT RESISTANCE: 20m OHMS MAX.

OPERATING TEMPERATURE: -25°C ~ +85°C

## MATERIALS

CONTACT MATERIAL: PHOSPHOR BRONZE

INSULATION MATERIAL: POLYESTER, UL 94V-0  
NYLON 6T

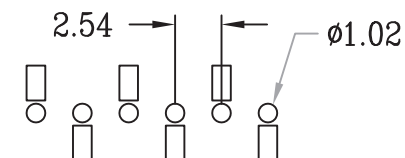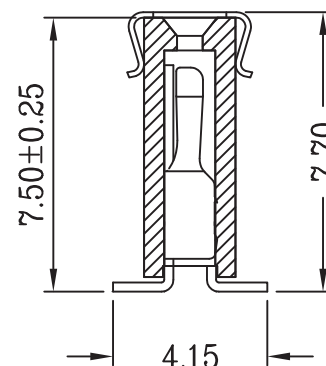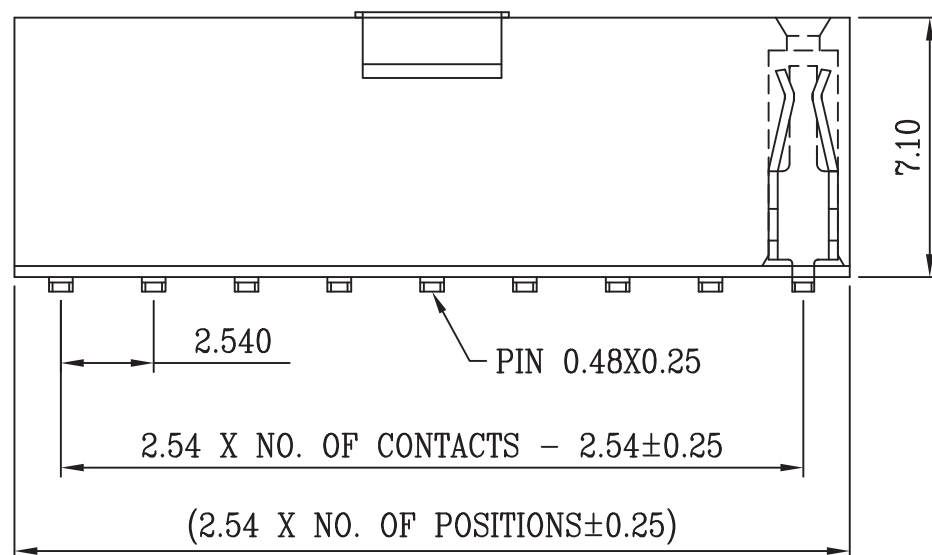

## RECOMMENDED P.C.B LAYOUT

## RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



## ORDER INFORMATION

F-Z75XC-1XxxR-LF  
SERIES | CAP | NON POST | HIGH 7.5mm | BOTTOM ENTRY SMT | LEADFREE | R TYPE FOOT  
1X02:02WAY  
1X40:40WAY

DESCRIPTION: 2.54mm Female Socket Single SMD type (H=7.5)