

RECOMMENDED P.C.B LAYOUT

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:

Contact Current Rating:3 Amperes.
 Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.
 Insulation Resistance:5000 Medohms Minimum.at DC 500V.
 Contact Resistance:25 Milliohms Maximum.
 Operating Temperature:-55°C to+105°C.

MECHANICAL CHARACTERISTICS:

Contact Insertion Force:341 g.Maximum.
 Contact Separation Force:21 g.Maximum.

MATERIALS:

Contacts:Bass.
 Insulator: PBT UL 94V-0 Rated.
 Shell:Cold Roller Steel.

FINISHES:

Contact:Gold Flash.
 Shell:Nickel Plated.

RoHS Compliant




煜倫股份有限公司

www.morethanall.com


DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1:1
 DATE
 SIZE A4 PROJECTION

TOLERANCES ARE

X.±
.X±
.XX±
.XXX±
ANG±



ORDER INFORMATION

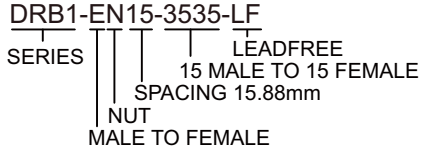

DESCRIPTION: D-SUB 0.350"(8.89mm) FOOTPRINT 15 MALE HIGH DENSITY CONNECTOR /15 FEMALE HIGH DENSITY CONNECTOR, DUAL PORT