


Contract:  
 Contact: Brass.  
 Insulator: PBT.  
 Finish: Gold flash plated over nickel.

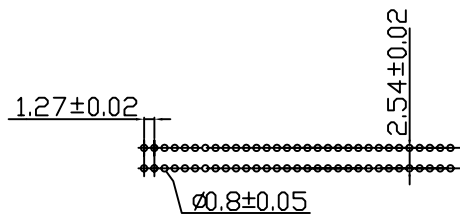

P. C. Board Layout

| Circuits | Dimension |       |       |       |       |       |
|----------|-----------|-------|-------|-------|-------|-------|
|          | A         | B     | C     | D     | E     | F     |
| 20       | 30.95     | 11.43 | 29.35 | 18.75 | 21.59 | 48.95 |
| 26       | 34.76     | 15.24 | 33.16 | 22.56 | 25.40 | 52.76 |
| 30       | 36.03     | 17.78 | 34.43 | 23.83 | 26.67 | 54.03 |
| 34       | 39.84     | 20.32 | 38.24 | 27.64 | 30.48 | 57.84 |
| 40       | 43.65     | 24.13 | 42.05 | 31.45 | 34.29 | 61.65 |
| 50       | 50.00     | 30.48 | 48.40 | 37.80 | 40.64 | 68.00 |
| 60       | 57.25     | 36.83 | 54.75 | 44.15 | 56.99 | 74.35 |
| 68       | 61.43     | 41.91 | 59.83 | 49.23 | 52.07 | 79.43 |
| 80       | 69.95     | 49.53 | 67.45 | 56.85 | 59.69 | 87.05 |
| 100      | 82.65     | 62.23 | 80.25 | 69.55 | 72.39 | 99.75 |

**MORETHANALL**  
 CONNECTORS  
 ASSEMBLIES

PART NO. HL-D2-xxx

DWG NO. HL-D2-xxx

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2  
 .XX ±  
 .XXX ±  
 AWG

DESCRIPTION: Pitch 1.27-2.54 Fully Latch Header Straight

AREA

REVISIONS

HK

DATE

煜倫股份有限公司