
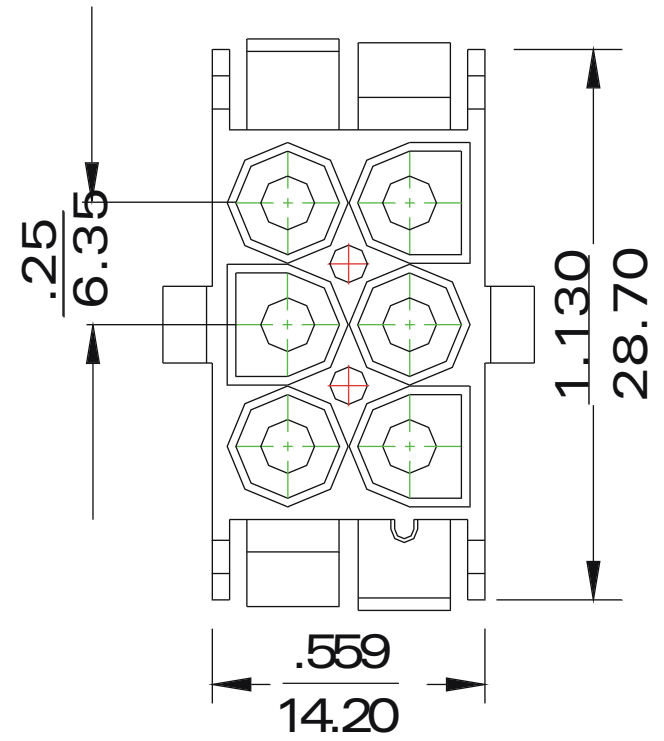


1 2 3 4 5 6 7 8 9 0

J
I
H
G
F
E
D
C
B
A

Circuits	Max-Rated	
	Amps	Voltage
6	10A #14	600V
	8A #16	
	6A #18	

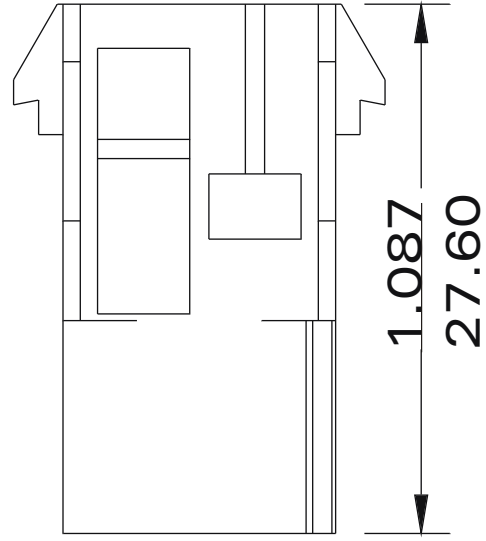

UL-P-3X02-LF
LEADFREE

RoHSCompliant

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫股份有限公司

PART NO. UL-P-3X02		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIPTION:			
DWG NO. UL-P-3X02		DRAWING BY			AREA	REVISIONS	HK	DATE
UNIT / mm	SCALE 1:1	PROJECTION						

- * Material : Nylon , UL94V-2
- * Standard color : nature
- * Integrally molded polarization
- * Friction lock

UL-P-3Xxx-LF
LEADFREE

RoHS Compliant

Voltage	600V			600V			600V		
Amps	#14 10A	#16 8A	#18 6A	#14 10A	#16 8A	#18 6A	#14 10A	#16 8A	#18 6A
Partno	UL-P-3X03			UL-P-3X04			UL-P-3X05		



PART NO. **UL-P-3Xxx**

DWG NO. **UL-P-3Xxx**

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司