
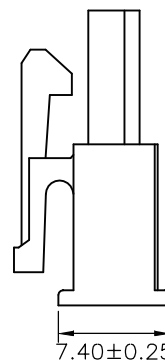


3P

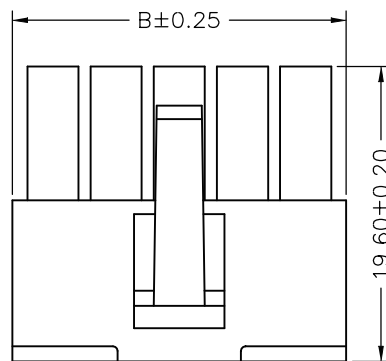

4P,5P

### SPECIFICATIONS

Current Rating: 7A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 10mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 1500V AC/minute  
 Material: Nylon 66,UL94V-0 or UL94V-2

### Ordering Information & Dimensions

| PART NO.   | Dimensions |       |
|------------|------------|-------|
|            | A          | B     |
| MF-SH-1X03 | 8.40       | 13.80 |
| MF-SH-1X04 | 12.60      | 18.00 |
| MF-SH-1X05 | 16.80      | 22.20 |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE


SIZE A4

P PROJECTION

X, ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±



### ORDER INFORMATION

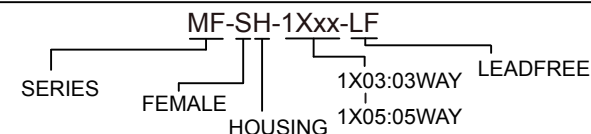

DESCRIPTION: **4.20mm PITCH**  
**HOUSING-RECEPTACLE, SINGLE ROW, MINI-FIT**