


Specifications

- Current Rating : 3 Amps
- Insulator Resistance : 5000 Megohms min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 500V
- Operating Temperature : -40°C ~ +105°C
- Max. Processing Temp. : 230°C For 30~60 Seconds
(260°C For 10 Seconds)
- Contact Material : Phosphor Bronze
- Insulator Material : Polyester, UL 94V-0
- Standard : Nylon-6T
- Contact Plated : Full Gold, Full Tin, Selective Plated

F-V37PC-2Xxx-LF
LEADFREE

RoHS Compliant

Recommended
P.C. Board Layout

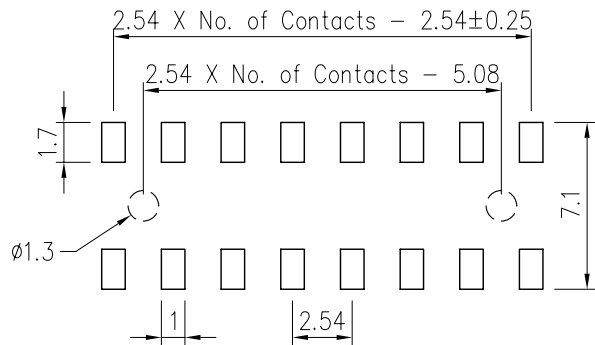

PART NO. F-V37PC-2Xxx

DWG NO. F-V37PC-2Xxx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

- .X ± 0.2
- .XX ±
- .XXX ±
- AWG

DESCRIP TION:

Female Header P2.54mm
Profile : 3.5mm, Dual Rows, SMT Type

AREA

REVISIONS

HK

DATE

煜倫股份有限公司