



Recommended P.C.B Layout

**MATERIAL**

Insulator : 30% Glass fiber PBT  
 Contact Pin : Brass

**SPECIFICATION**

Current Rate : 3 AMP  
 Insulation Resistance : 5000MΩMin. at DC 500V  
 Contact Resistance : 20mΩMax. at DC 100mA  
 Dielectric Voltage : AC 500V for one minute  
 Operation Temperature : -40°C to + 105°C

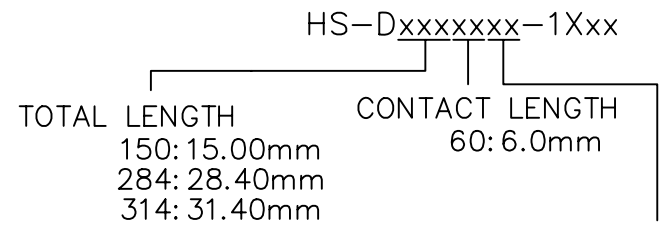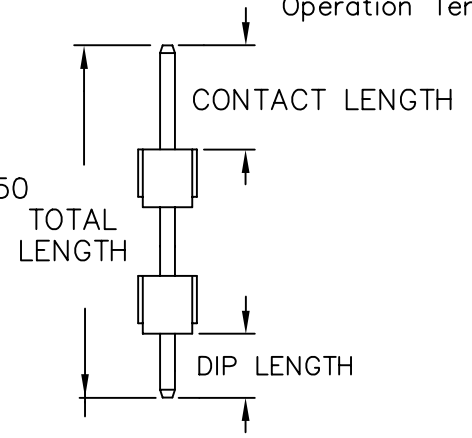

DIP LENGTH  
 60: 6.0mm  
 30: 3.0mm



PART NO. HS-Dxxxxxxx-1Xxx

DWG NO. HS-Dxxxxxxx-1Xxx

FILE NO.

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.3  
 .XX ± 0.2  
 .XXX  
 AWG

DESCRIPTION:

PIN HEADER 2.54\*2.54mm  
 STRAIGHT STACK

AREA

REVISIONS

HK

DATE

煜倫股份有限公司