
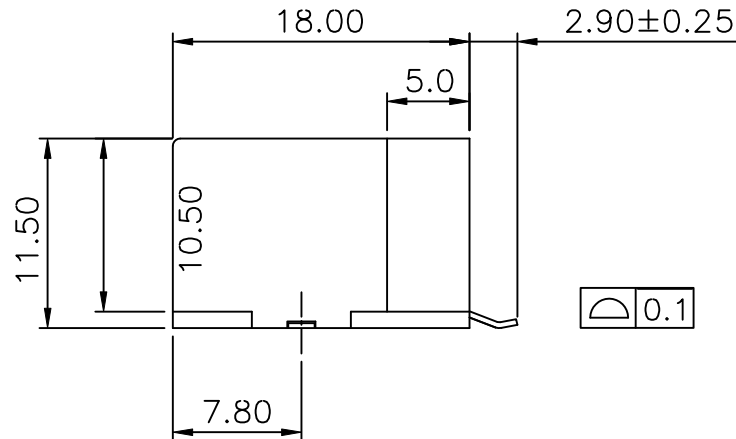


1 2 3 4 5 6 7 8 9 0



J
I
H
G
F
E
D
C
B
A

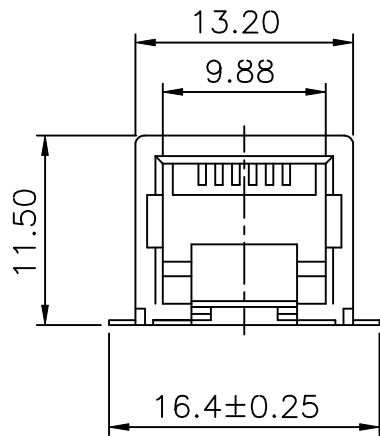

MATERIAL:

- HOUSING-DSM STANYL TE250F6 (NYLON-46)
HEAT DEFLECTION TEMP.290°
BLACK COLOR. UL94-0
- CONTACTS-0.35mm THICK PHOS-BRONZE
PLATED WITH HARD GOLD AND
TIN/LEAD IN SOLDER AREA.
- HOLD DOWN-0.30mm THICK COPPER ALLOY,
PLATED WITH TIN/LEAD.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

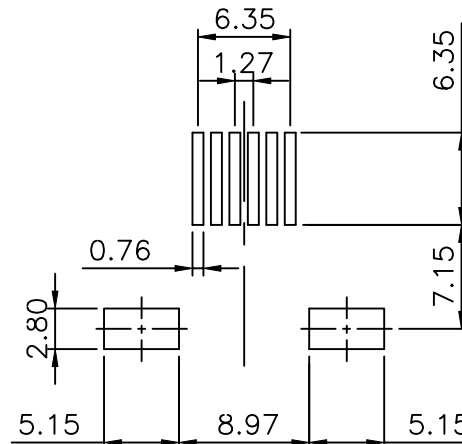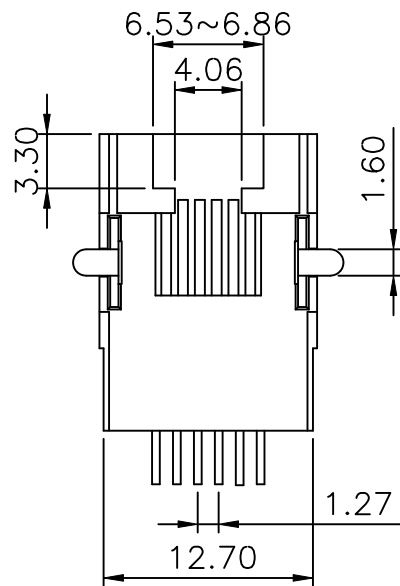

PCB LAYOUT

Ref.



焯倫有限公司

PART NO. MJW11-KX06-0606

DWG NO. MJW11-KX06-0606

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.25
.XX ± 0.13
.XXX ± 0.05
AWG

DESCRIPTION:

6POSITION SMT TYPE
SIDE ENTRY PCB JACK

AREA

REVISIONS

HK

DATE