

1 2 3 4 5 6 7 8 9 0








J  
I  
H  
G  
F  
E  
D  
C  
B  
A

MATERIAL:

- 1.HOUSING: PBT+30 %G.F.(UL 94V-0)
- 2.TERMINAL: Phosphor Bronze, C5191R-H T=0.300.01mm
- 3.TETMINAL PLATED: GOLD FLASH ON CONTACT ;  
100u" MIN NICKEL OVERALL.

SPECIFICATION:

- 1.CURRENT RATING: 0.5 AMP. MAX.
- 2.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC  
R.M.S. FOR ONE MINUTE.
- 3.INSULATION RESISTANCE: 1000M OHMS MIN.
- 4.CONTACT RESISTANCE : 30m OHMS MAX.
- 5.OPERATING TEMPERATURE : -20°C TO +85 °C.

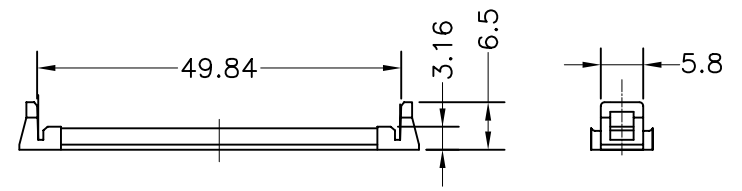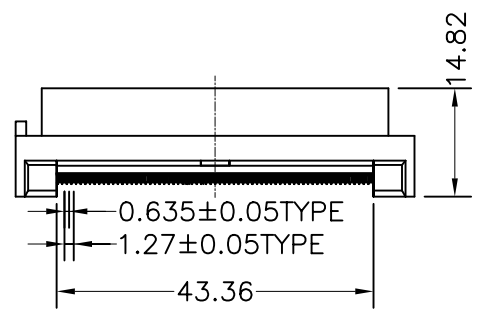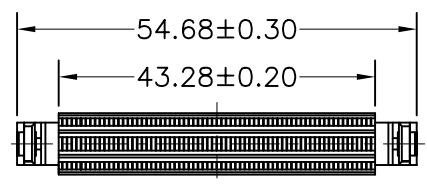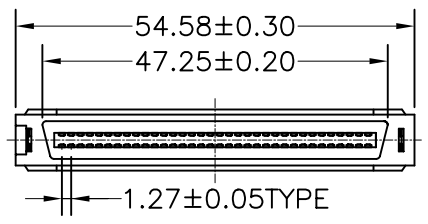

PART NO. HPCP-SF-068

DWG NO. HPCP-SF-068

FILE NO.

CHECKED BY CY

DRAWING BY

TOLERANCES ARE  
.X ± 0.20  
.XX ± 0.15  
.XXX ±  
AWG

DESCRIP TION:

SCA (F)68P 刺破式(ASS'Y)  
CUSTOMER

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

AREA

REVISIONS

HK

DATE