


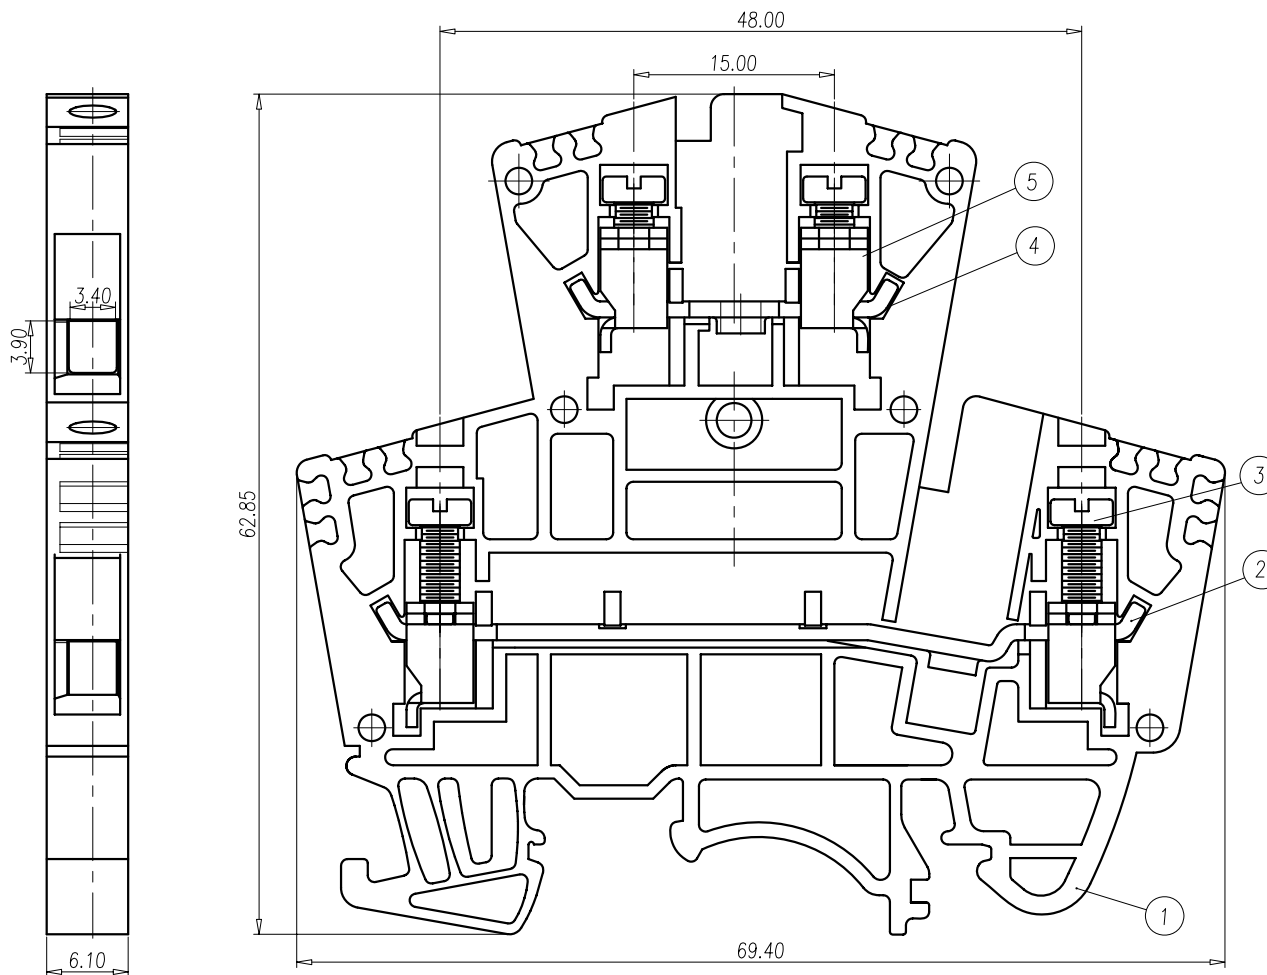

Normal Geometric Tolerancing				
—	//	≡	⊥	
0 to 100	0.2		0 to 10	0.2
over 100 to 150	0.3	0.3	over 10	0.3
over 150	0.5			
Total Pitch Tolerances		Normal dimension Tolerances		
0<U≤30	±0.20	0~30	±0.25	
30<U≤53	±0.25	over 30~53	±0.30	
53<U≤70	±0.30	over 53~70	±0.35	
70<U≤90	±0.35	over 70~90	±0.44	
90<U≤115	±0.44	over 90~115	±0.55	
115<U≤150	±0.55	over 115~150	±0.70	
150<U≤200	±0.70	over 150~200	±0.85	
200<U≤250	±0.85	over 200~250	±1.00	
250<U≤320	±1.00	over 250~320	±1.20	

NOTES:

1. Rating: UL 300/600V 30/5A
IEC 630 V 32A
2. Insulation Withstands Voltage:
AC 2000V at 1 minute
3. Insulation Resistance:
500MΩ or more at DC1000V
4. Using Temperature Range:
-40°C~+105°C
5. Screw Torque Value: 0.6 N·m
6. Suitable Electric Wire:
AWG 22~10 (IEC 0.14~4mm²)
7. RoHS compliance

5	WIRE CAGE	STEEL	Zn Plated
4	CONDUCTOR2	COPPER ALLOY	Tin Plated
3	SCREW	STEEL	M2.5/Zn Plated
2	CONDUCTOR1	COPPER ALLOY	Tin Plated
1	HOUSING	PA66	UL94-V0 GREY
ITEM	NAME OF PART	MATERIAL	NOTES

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

TBR061-W62-01-LF

SERIES

LEADFREE

01 WAY

HIGH 62.85mm

SCREW WIRE

DESCRIPTION: