


Material:

Housing: High Temperature Plastic UL94V-0
Contacts: Phosphor Bronze.

Electrical Characteristics:



Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 30mΩ max. at DC 100mA.
Operating Temperature: -65°C~+125°C .

***RoHS Compliant**

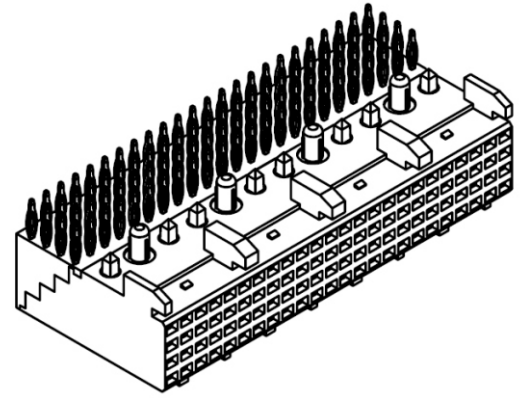

FUB-SQxx-4Xxx-LF
LEADFREE
02:2.90mm
03:3.53mm

RoHS CoMPLIANT

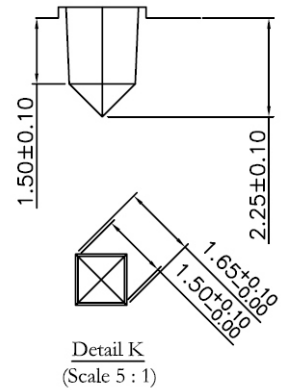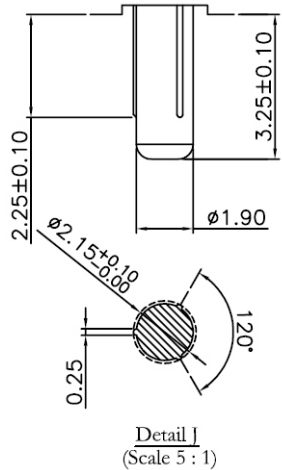

Remark:
Ø1.50 For Tooling.
Ø1.60 For Tooling.

Position (n)	Dimension		
	A	B	C
24	11.95	10.0	0
48	23.95	22.0	12.0
72	35.95	34.0	24.0
96	47.95	46.0	36.0
120	59.95	58.0	48.0
144	71.95	70.0	60.0
168	83.95	82.0	72.0
192	95.95	94.0	84.0



PART NO. FUB-SQxx-4Xxx

DWG NO. FUB-SQxx-4Xxx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2
.XX ± 0.1
.XXX ±
AWG

DESCRIP TION:

AREA	REVISIONS	HK	DATE
------	-----------	----	------

煜倫股份有限公司