



CONTACT RESISTANCE: 20m OHMS MAX. AT DC 100mA
 INSULATOR RESISTANCE: 1000M OHMS MIN. AT DC 500V
 CURRENT RATING: 1 AMP

DIELECTRIC WITHSTANDING VOLTAGE: AC 500V FOR 1 MINUTE
 OPERATING TEMPERATURE: -55°C - +105°C
 CONTACT: PHOSPHOR BRANZE
 HOUSING: L.C.P. (Black Color)

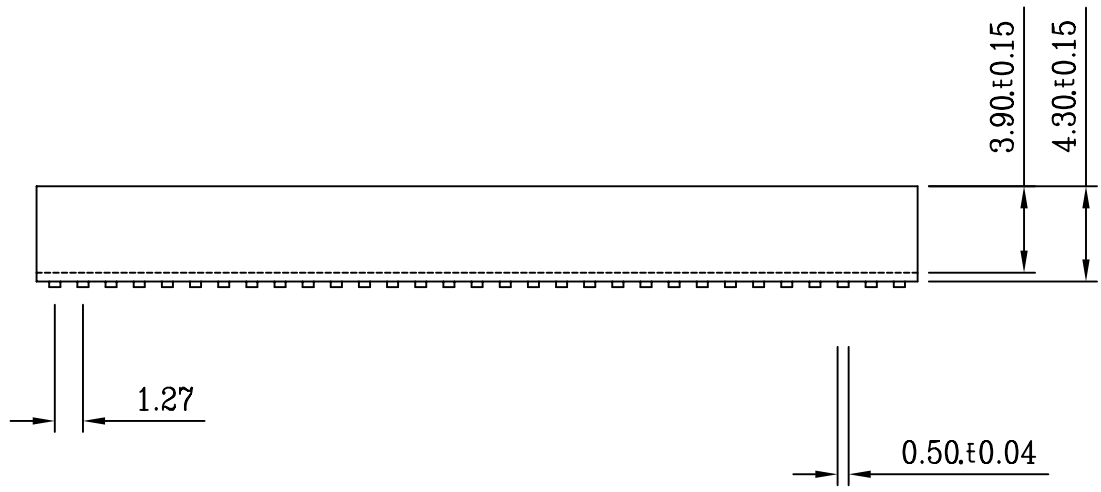

YA-R43-1Xxx-LF
 LEADFREE

RoHS Compliant



PART NO. YA-R43-1Xxx

DWG NO. YA-R43-1Xxx

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

1.27mm Dip Socket (Straight/Base:4.3mm)

FILE NO.

DRAWING BY

.X ± 0.15
.XX ± 0.10
.XXX ±

AREA

REVISIONS

HK

DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

AWG