

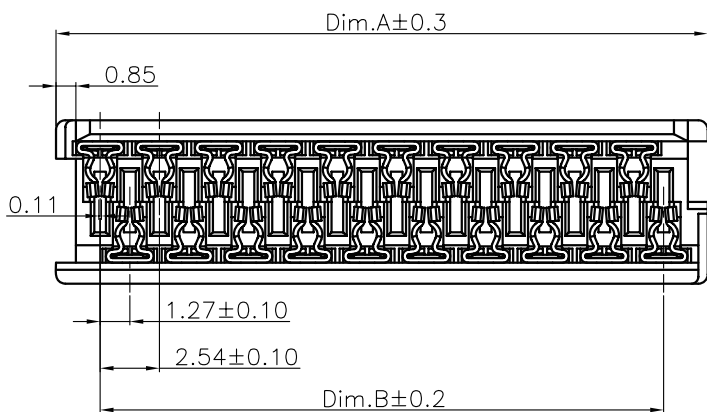


Specifications:
 Current Rating:1.2A
 Voltage Rating:32V
 Contact Resistance:10m ohm. Max.
 Insulation Resistance:1000M ohm. Min.
 Withstanding Voltage:500V AC For One Minute
 Operating Temperature Range:-40°C To +105°C
 APPLICABLE WIRE: AWG #26 and #28
 Materials:
 Insulator:High Temp. Plastic(PBT UL94V-0)
 Insulator Color:White
 Contact:Phosphor Bronze
 Plating:Tin Plated

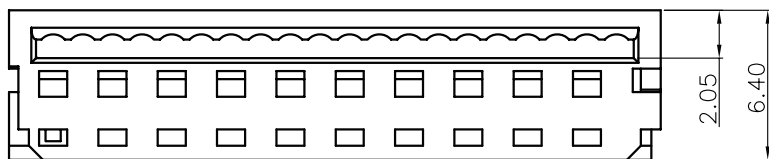

Dimension:

Pos.	Dimension		Pos.	Dimension	
	A	B		A	B
04	7.59	3.81	16	22.83	19.05
06	10.13	6.35	18	25.37	21.59
08	12.67	8.89	20	27.91	24.13
10	15.21	11.43	22	30.45	26.67
12	17.75	13.97	24	32.99	29.21
14	20.29	16.51	26	35.53	31.75

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

PF-SF-xx-LF
 SERIES | LEADFREE
 | 04-26WAY
 | IDC
 | FEMALE

DESCRIPTION: 1.27mm Flat IDC Connector