
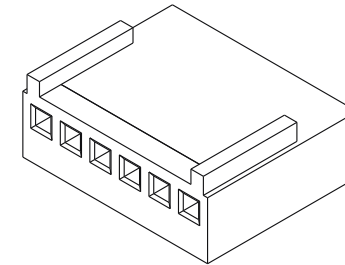
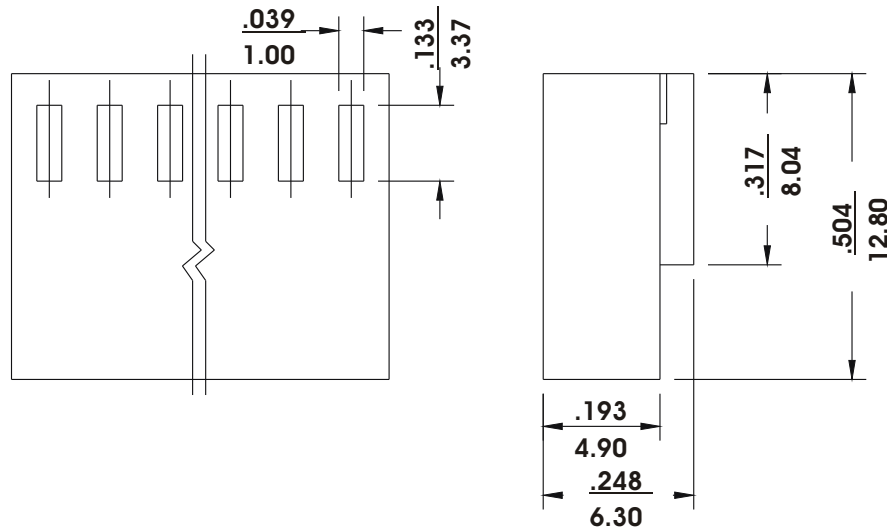


RK Series Polarizing Housings

- * Material : Nylon UL 94V-2
- * Current rating : 1A, AC/DC
- * Voltage rating : 250V, AC/DC
- * Molded friction lock
- * Optional polarization or locking ramp
- * 2-20 circuits available

RK-H-xx-LF
LEADFREE
RoHS Compliant

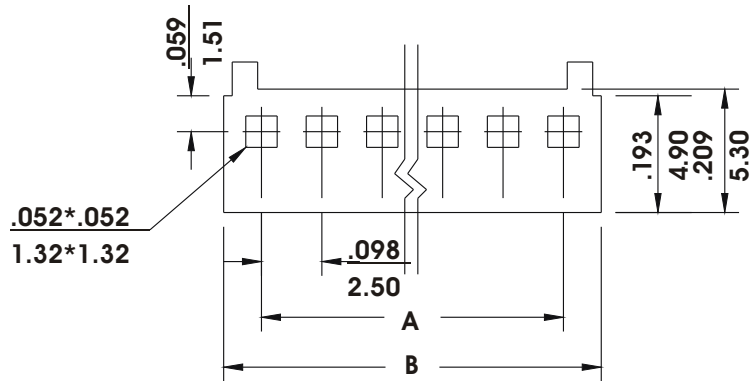

Dimension information-inch/mm

Circuits	Dim. A		Dim. B		Circuits	Dim. A		Dim. B	
	inch	mm	inch	mm		inch	mm	inch	mm
2	0.098	2.50	0.220	5.60	12	1.083	27.50	1.205	30.60
3	0.197	5.00	0.319	8.10	13	1.181	30.00	1.303	33.10
4	0.295	7.50	0.417	10.60	14	1.280	32.50	1.402	35.60
5	0.394	10.00	0.516	13.10	15	1.378	35.00	1.500	38.10
6	0.492	12.50	0.614	15.60	16	1.476	37.50	1.598	40.60
7	0.591	15.00	0.713	18.10	17	1.575	40.00	1.697	43.10
8	0.689	17.50	0.811	20.60	18	1.673	42.50	1.795	45.60
9	0.787	20.00	0.909	23.10	19	1.772	45.00	1.894	48.10
10	0.886	22.50	1.008	25.60	20	1.870	47.50	1.992	50.60
11	0.984	25.00	1.106	28.10					



PART NO. **RK-H-xx**

DWG NO. **RK-H-xx**

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE

焯倫股份有限公司