

**Material:**






Housing: See Order Information.  
 Housing Color: See Order Information.  
 Terminal: Copper Alloy  
 Metal Band: Copper Alloy

**Finish:**

Terminal: See Order Information.  
 Metal Band: See Order Information.

**Specification:**

Contact Resistance: 10mΩ Max.  
 Current Rating: 5A AC/DC  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding Voltage: 1500V AC/Minute  
 Operation Temperature: -25° ~ +85°  
 Voltage Rating: 250V AC/Minute  
 Applicable Wire Range: AWE#18-#24  
 Applicable P.C.B Thickness: 0.8mm-1.6mm  
 Applicable P.C.B Hole Dia:  $\phi 1.8\text{mm} \pm 0.05$

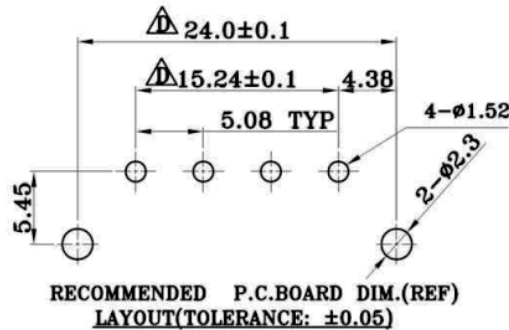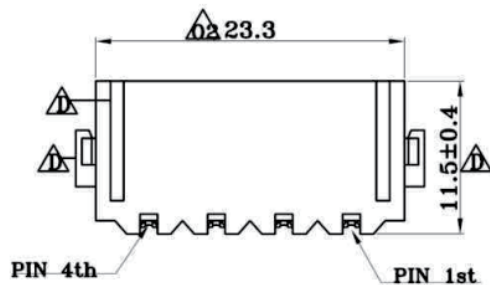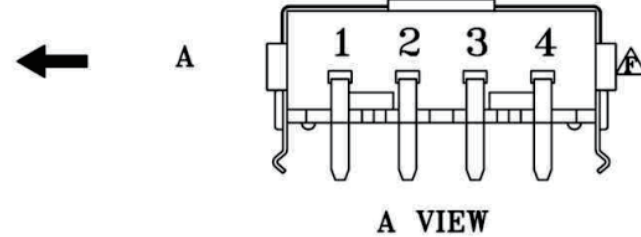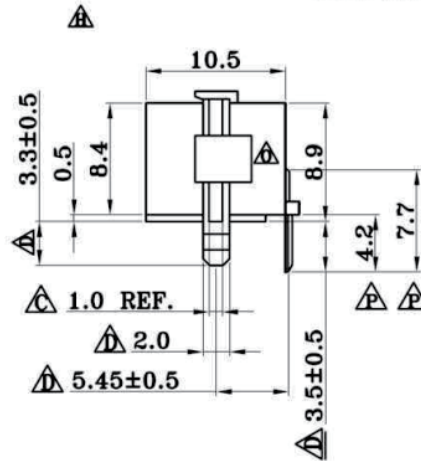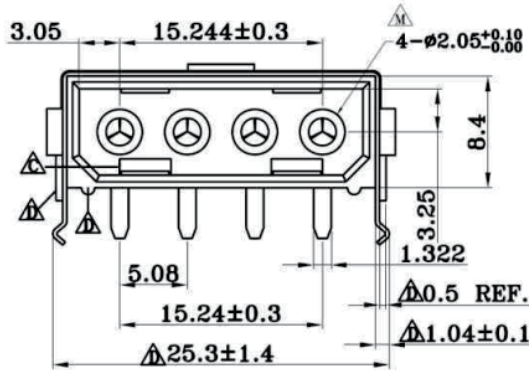

**NOTES:**

- High temp. Process Statement:  
230 degree C for 30 to 60 seconds,  
and 260 degree C for 10 seconds.
- This component and its homogeneous subcomponents are RoHS compliant.
- Dry plastic ball under temperature 150 degree for 6 hours before.
- Keep with water-resist bag and silica gel after assembling .
- Must use 100% new material.

**RoHS Compliant**

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm

SCALE 1:1


DATE

SIZE A4


TOLERANCES ARE

X, ±  
 X, ±  
 .XX ±  
 .XXX ±  
 ANG ±

P PROJECTION



**ORDER INFORMATION**

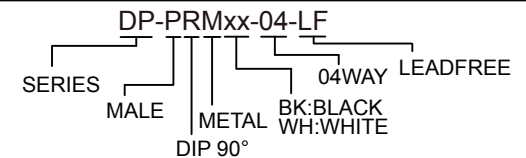

DESCRIPTION:

