
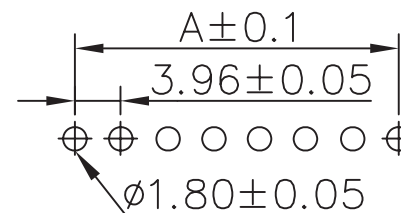


Material:
 Insulation: Glass filled polyester UL 94V-0
 Color White(Nature)
 Contact: Brass

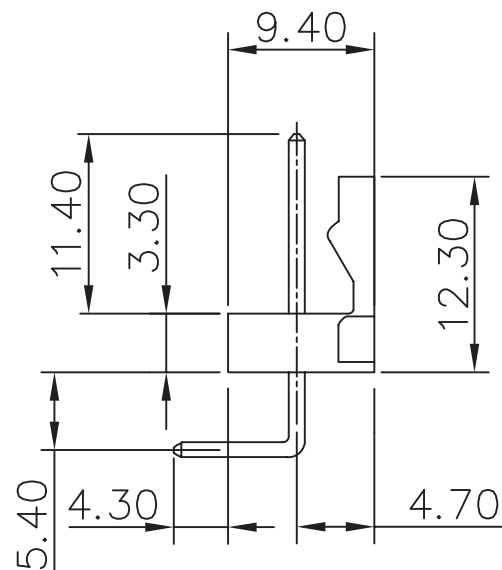

$A = 3.96 \times \text{NO. OF SPACES}$
 $B = A + 3.96$
 * Available in 2 through 24 circuits

Recommended P.C. Board Layout

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm SCALE 1:1


DATE

SIZE A4


TOLERANCES ARE

X. ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±

PJECTION



ORDER INFORMATION

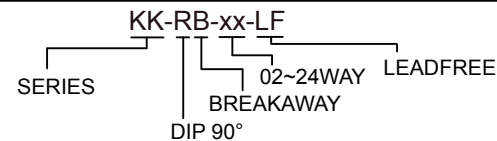

DESCRIPTION: 2.54mm STRAIGHT DIP HEADER