

NOTES

1.MATERIAL:

HOUSING: NYLON46 UL 94V-0


ACTUATOR: PPA UL 94V-0

TERMINAL: PHOSPHOR BRONZE

2.PLATING: G: Lead Free

Sn 120u" over Ni 50u"



3.PACKING: TUBE.

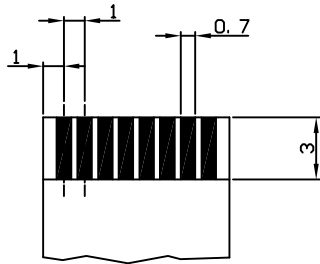


FFC/FPC DIMENSION
THICKNESS 0.3±0.05mm
TOLERANCE: 0.05mm

30	29.00	31.20	35.40
29	28.00	30.20	34.40
28	27.00	29.20	33.40
27	26.00	28.20	32.40
26	25.00	27.20	31.40
25	24.00	26.20	30.40
24	23.00	25.20	29.40
23	22.00	24.20	28.40
22	21.00	23.20	27.40
21	20.00	22.20	26.40
20	19.00	21.20	25.40
19	18.00	20.20	24.40
18	17.00	19.20	23.40
17	16.00	18.20	22.40
CKT	DIM. A	DIM. B	DIM. C

16	15.00	17.20	21.40
15	14.00	16.20	20.40
14	13.00	15.20	19.40
13	12.00	14.20	18.40
12	11.00	13.20	17.40
11	10.00	12.20	16.40
10	9.00	11.20	15.40
9	8.00	10.20	14.40
8	7.00	9.20	13.40
7	6.00	8.20	12.40
6	5.00	7.20	11.40
5	4.00	6.20	10.40
4	3.00	5.20	9.40
3	2.00	4.20	8.40
CKT	DIM. A	DIM. B	DIM. C

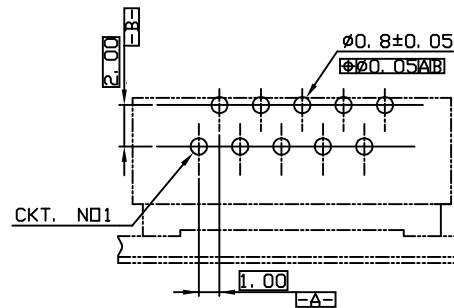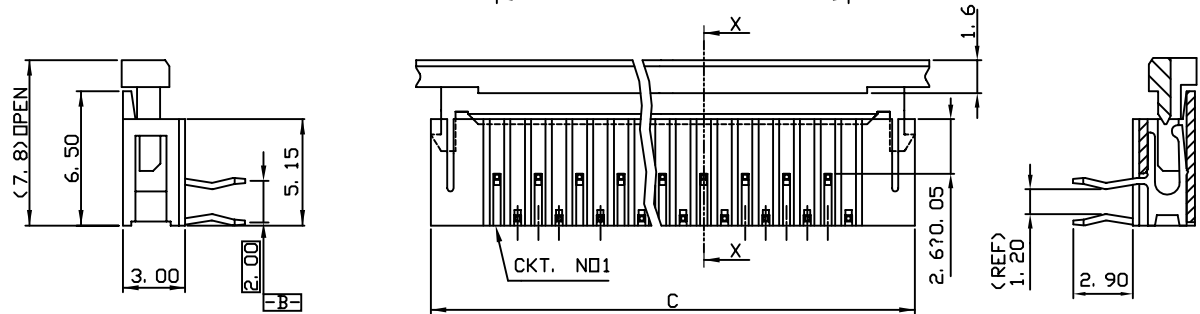

PC BOARD LAYOUT:
COMPONENT SIDE
PCB T=1.6mm

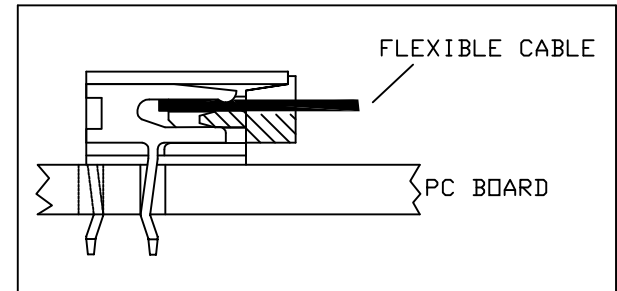

FPA-SZAL2-xx-LF
LEADFREE
RoHS Compliant



PART NO. FPA-SZAL2-xx

DWG NO. FPA-SZAL2-xx

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

ZIF for FFC/FPC
(1.0mm) ASS'Y(RIGHT ANGLE)

FILE NO.

DRAWING BY

.X±0.2
.XX±0.1
.XXX±
AWG

AREA

REVISIONS

HK

DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

