


Contract:
 Contact: Brass.
 Insulator: Nylon 9T.
 Finish: Gold flash plated over nickel.

ML-D-xxx-LF
 LEADFREE

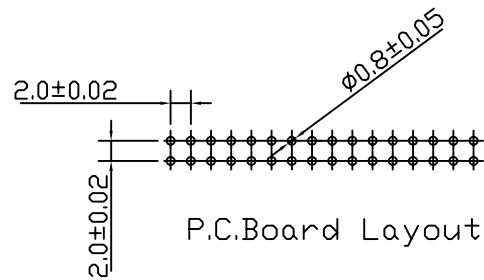

P.C.Board Layout

RoHS Compliant

Circuits	Dimension			Circuits	Dimension		
	A	B	C		A	B	C
10	10.0	25.9	8.0	26	26.0	41.9	24.0
12	12.0	27.9	10.0	30	30.0	45.9	28.0
14	14.0	29.9	12.0	32	32.0	47.9	30.0
16	16.0	31.9	14.0	34	34.0	49.9	32.0
20	20.0	35.9	18.0	40	40.0	55.9	38.0
22	22.0	37.9	22.0	44	44.0	59.9	42.0
24	24.0	39.9	22.0	50	50.0	65.9	48.0



PART NO. ML-D-xxx

DWG NO. ML-D-xxx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE
 .X ± 0.2
 .XX ±
 .XXX ±
 AWG

DESCRIPTION: Shrouded Header 2.0 Pitch Dual Row Straight (Short Lever)

AREA	REVISIONS	HK	DATE
------	-----------	----	------

焯倫股份有限公司