


■ MATERIAL

- Insulator: Glass-Fiber P.B.T(UL94V-0)
- Contact: Phosphor Bronze (P) or Brass (B)
- Plating: Gold Plating Over Nickel.

■ SPECIFICATIONS

- Insulation Resistance: 5000 M Ω min at 500 VDC
- Dielectric Withstanding Voltage: 1000 V-AC/1 min
- Current Rating: 3A
- Contact Resistance: 20m Ω max
- Operating Temperature: -55 $^{\circ}$ c to 105 $^{\circ}$ c
- Insertion Force: 300g max per pair
- Withdrawal Force: 77g min per pair

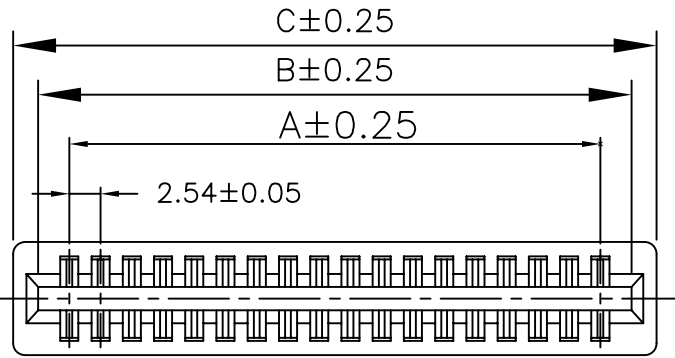

■ DIMENSIONS

Circuits	A	B	C	D
6	5.08	10.66	14.22	
8	7.62	13.20	16.76	
10	10.16	15.74	19.30	
12	12.70	18.28	21.84	
14	15.24	20.82	24.38	
16	17.78	23.36	26.92	
18	20.32	25.90	29.46	
20	22.86	28.44	32.00	
22	25.40	30.98	34.54	
24	27.94	33.52	37.08	
26	30.48	36.06	39.62	
28	33.02	38.60	42.16	
30	35.56	41.14	44.70	
32	38.10	43.68	47.24	
34	40.64	46.22	49.78	
36	43.18	48.76	52.32	
38	45.72	51.30	54.86	
40	48.26	53.84	57.40	
42	50.80	56.38	59.94	
44	53.34	58.92	62.48	
46	55.88	61.46	65.02	

Circuits	A	B	C	D
48	58.42	64.00	67.56	
50	60.96	66.54	70.10	
52	63.50	69.08	72.64	
54	66.04	71.62	75.18	
56	68.58	74.16	77.72	
58	71.12	76.70	80.26	
60	73.66	79.24	82.80	
62	76.20	81.78	85.34	
64	78.74	84.32	87.88	
66	81.28	86.86	90.42	
68	83.82	89.40	92.96	
70	86.36	91.94	95.50	
72	88.90	94.48	98.04	
80	99.06	104.64	108.20	
86	106.68	112.26	115.82	
92	114.30	119.88	123.44	
98	129.54	135.12	138.68	
100	124.46	130.04	133.60	
104	129.54	135.12	138.68	
110	137.16	142.74	146.30	
120	149.86	155.44	159.00	

GE-D-xxx-LF
LEADFREE

RoHS Compliant



PART NO. GE-D-xxx

DWG NO. GE-D-xxx

FILE NO.

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE
.X
.XX
.XXX
AWG

DESCRIPTION:
AREA

SLOT 2.54mm PITCH FOR PCB DIP SOLDER
REVISIONS
HK
DATE

煜倫股份有限公司