


Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 P.B.T

Recommended P.C.Board
 Hole Layout

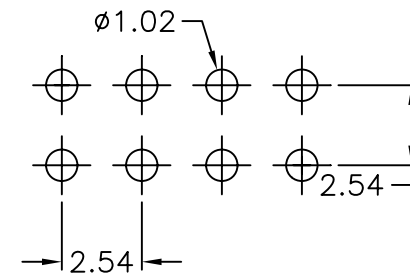

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.38
 .XX ± 0.25
 .XXX ± 0.13
 ANG ±



ORDER INFORMATION

F-D57-2Xxx-LF
 SERIES | LEADFREE
 2X02:02 WAY
 2X40:40 WAY
 HIGH 5.7mm
 DIP 180°

DESCRIPTION: 2.54 FEMALE HEADER DUAL ROWS DIP TYPE BASE 5.65H