

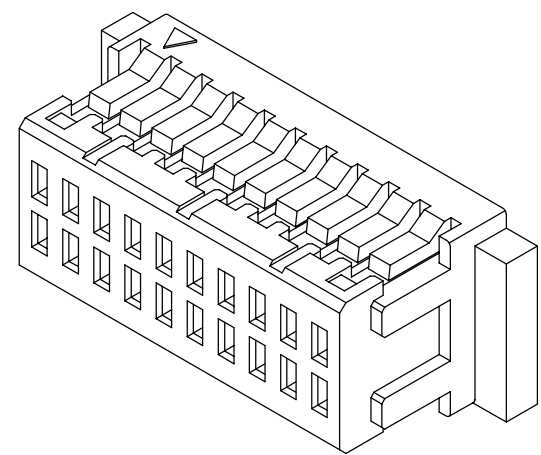
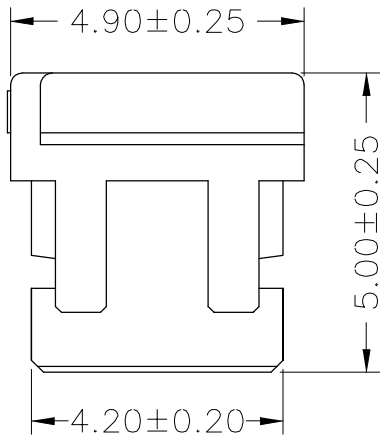


1 2 3 4 5 6 7 8 9 0

J
I
H
G
F
E
D
C
B
A

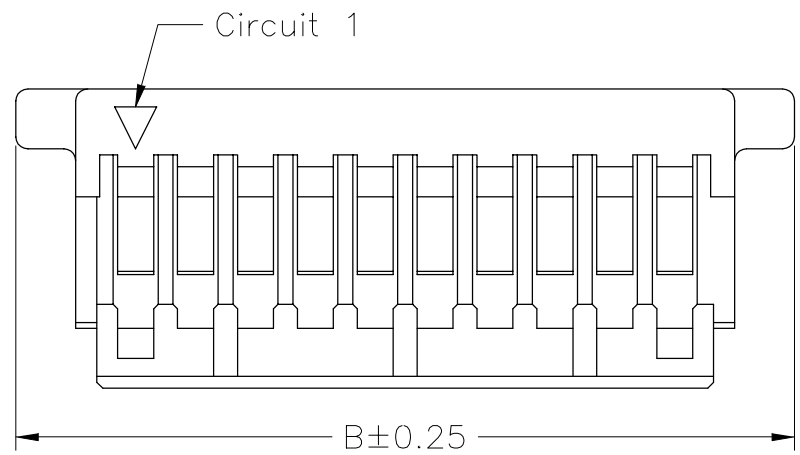

SPECIFICATIONS
 Current Rating: 1A AC,DC
 Voltage Rating: 50V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 500MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Material: PBT,UL94V-0

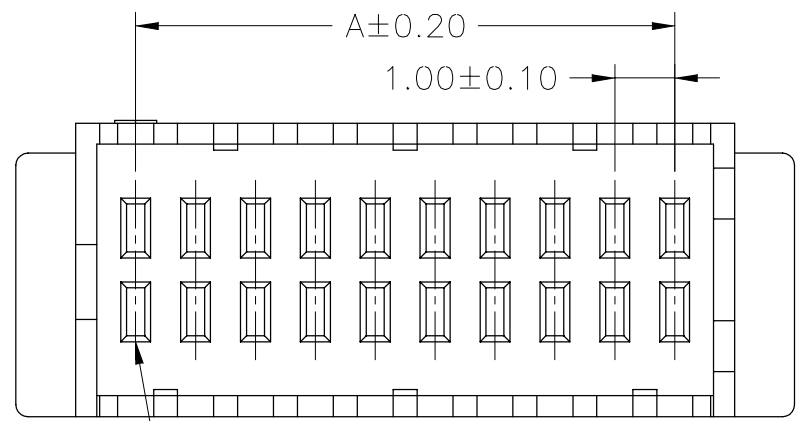

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
SHD-H-20	9.00	13.00
SHD-H-30	14.00	18.00
SHD-H-40	19.00	23.00
SHD-H-50	24.00	28.00

SHD-H-xx-LF
 LEADFREE
RoHS Compliant



PART NO. **SHD-H-xx**

DWG NO. **SHD-H-xx**

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2
 .XX ±
 .XXX ±
 AWG

DESCRIPTION: 1.0mm HOUSING-DUAL ROW

AREA	REVISIONS	HK	DATE

煜倫股份有限公司