


Features:

- 2 ~ 15 circuits available
- Material: UL 94V-0 nylon 66
- Tin-plated brass pin
- .025"(0.64mm) square pin
- Standard color: Orange
- Recommended P.C.B. thickness: .063"(1.6mm)

Specification:

- Current rating: 3A AC, DC
- Voltage rating: 250V AC, DC
- Contact resistance: 20mΩ Max.
- Dielectric withstanding voltage: 800V AC/minute
- Ambient temperature range: -25°C ~ 85°C

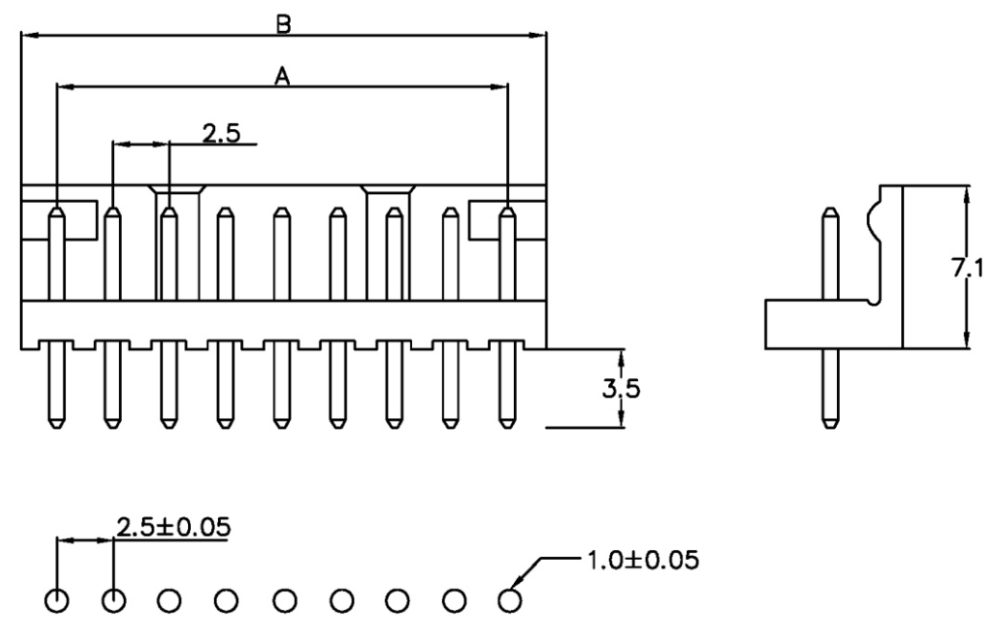

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
2	2.50	5.50	6	12.50	15.50	10	22.50	25.50	14	32.50	35.50
3	5.00	8.00	7	15.00	18.00	11	25.00	28.00	15	35.00	38.00
4	7.50	10.50	8	17.50	20.50	12	27.50	30.50			
5	10.00	13.00	9	20.00	23.00	13	30.00	33.00			

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1 : 1

.XX±


DATE

.XXX±

ANG±

SIZE A4

PPOJECTION



ORDER INFORMATION

ILG-D-xx-LF  
SERIES | LEADFREE  
02~15WAY  
DIP 180°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: