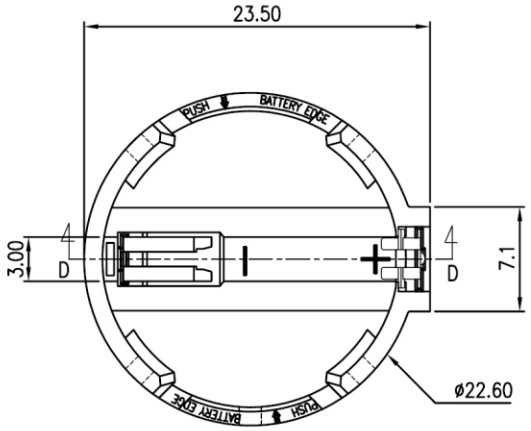

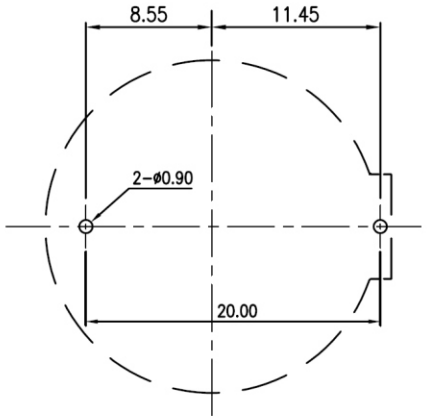

PCB LAYOUT

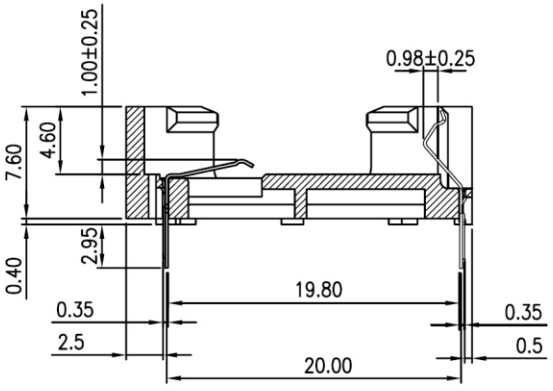

NOTES:

MATERIAL:

Body: Nylon66 with glass fiber

Contact: Phosphor Bronze

FINISH:

Contact: Sn only 100μ" plated over Ni 30μ" under-plating

SPECIFICATION:

Application: For 3V lithium battery (CR2032)

Insulator resistance: 5000 MΩ Min.

Operation temperature: -55°C to +105°C.

Durability: 50 cycles

Contact resistance: 30 mΩ Max.

BTH-D76-20-LF

LEADFREE

RoHS Compliant

MORETHANALL CONNECTORS ASSEMBLIES	PART NO. **BTH-D76-20**						
	DWG NO. **BTH-D76-20**	CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:			
煜倫股份有限公司	FILE NO.	DRAWING BY					
	UNIT / mm	SCALE 1 : 1	PROJECTION	AREA	REVISIONS	HK	DATE