

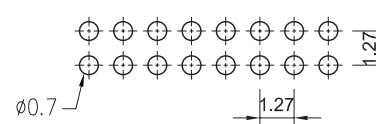


**Recommended
P.C. Board Hole Layout**



Specifications

- Current Rating : 1 Amp
- Insulator Resistance : 1000 Megohms min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 300V
- Operating Temperature : -40° C ~ +105° C
- Contact Material : Brass
- Insulator Material : Polyester, UL 94V-0 Nylon-6T
- Contact Plated : See Option
- Standard: Full Gold Flash

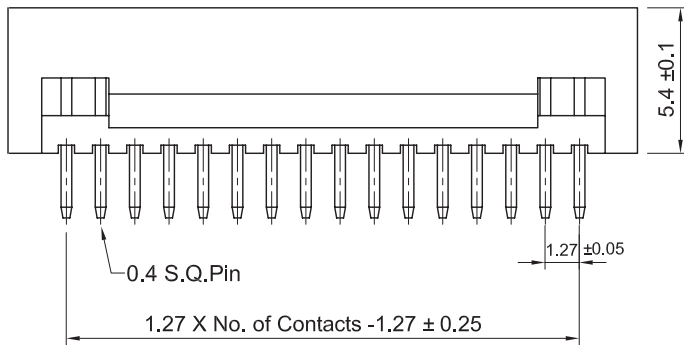

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE


SIZE A4

P PROJECTION


X, ±
.X ± 0.20
.XX ± 0.10
.XXX ±
ANG ±

煜倫股份有限公司

www.morethanall.com



ORDER INFORMATION

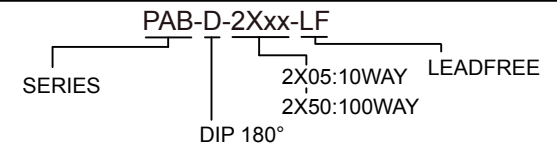

DESCRIPTION: Box Header P1.27 X 1.27mm H:5.4mm Straight Type