
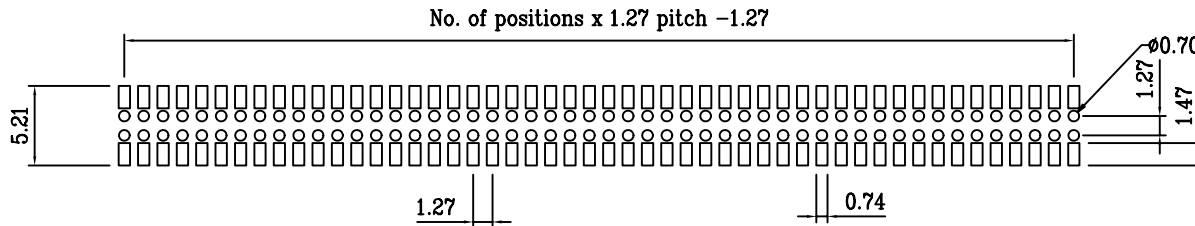



1 2 3 4 5 6 7 8 9 0

J
I
H
G
F
E
D
C
B
A

SPECIFICATIONS

- * Current Rating : 1 Amps
- * Insulator resistance: 5000 Megohms min.
- * Dielectric withstanding: AC 500 V
- * Operating Temperature: -40°-+105°C
- * Max Processing Temp: 230° for 30~60 seconds
(260° for 10 seconds)
- * Contact Material: Phosphor bronze
- * Housing: L.C.P (UL 94 V-0)

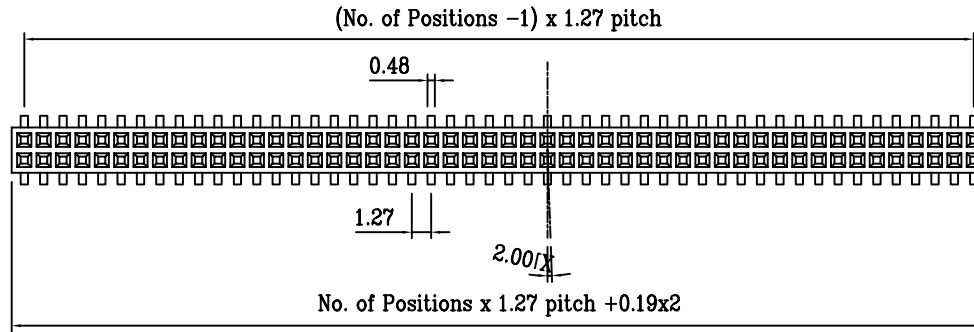

Recommended P.C.B. Layout

YA-V45X-2Xxx-LF
LEADFREE



PART NO. YA-V45X-2Xxx

DWG NO. YA-V45X-2Xxx

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

Dual Row 1.27x1.27 SMD Female

煜倫股份有限公司

FILE NO.

DRAWING BY

.X ±0.15
.XX ±0.10
.XXX ±0.05
AWG

AREA

REVISIONS

HK

DATE

UNIT / mm

SCALE 1:1

PROJECTION

