


**SPECIFICATIONS**

BODY MATERIAL: THERMOPLASTIC (UL 94V-0).BLACK  
 TERMINALS: TIN PLATED BRASS  
 LEVER: THERMOPLASTIC (UL 94-V-0),ORANGE  
 WIRE RANGE AWG 14-18STR  
 RATING: 10AMPERES. 75 VAC  
 INSULATION WITHSTANDS VOLTAGE AC 1500V/MIN  
 INSULATION RESISTANCE 500M OR MORE AT DC 500V  
 MINMUM 2POLES WIT END WALL

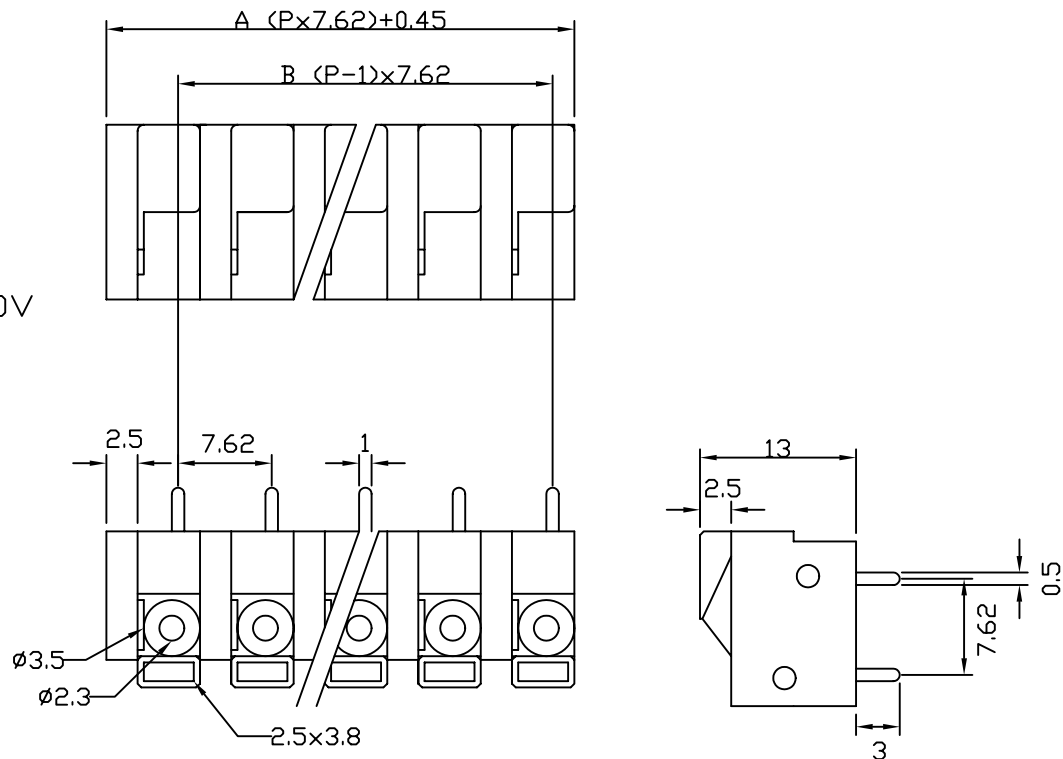

**DIMENSION:±0.5**

<b>POLE</b>	2	3	4	5	6	7	8	9	10	11	12	13	14	15			
<b>A</b>	15.69	23.31	30.93	38.55	46.17	53.79	61.41	69.03	76.65	84.27	91.89	99.51	107.13	114.75			
<b>B</b>	7.62	15.24	22.86	30.48	38.1	45.72	53.34	60.96	68.58	76.2	83.82	91.44	99.06	106.68			
<b>POLE</b>	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
<b>A</b>	122.37	129.99	137.61	145.23	152.85	160.47	168.09	175.71	183.33	190.95	198.57	206.19	213.81	221.4	229.1	---	---
<b>B</b>	114.3	121.92	129.54	137.16	144.78	152.4	160.02	167.64	175.26	182.88	190.5	198.12	205.74	213.4	221	---	---



煜倫有限公司

PART NO. TBX076-R13-xx		CHECKED BY CY		TOLERANCES ARE		DESCRIP TION: PITCH 7.62mm	
DWG NO. TBX076-R13-xx		DRAWING BY		.X ± 0.3 .XX ± .XXX ± AWG		AREA	
FILE NO.		PROJECTION		REVISIONS		HK	
UNIT / mm	SCALE 1:1	DATE					