
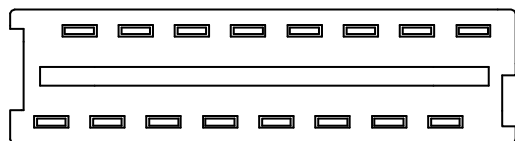



SPECIFICATIONS

Material
 Insulator: PBT, glass reinforced, rated UL 94V-0
 Contact: Phosphor Bronze
 Electrical
 Current Rating: 1 Amp
 Contact Resistance: 30m OHMmax.
 Insulation RESISTANCE: 3000 MOHM min.
 Dielectric Withstanding voltage: 500v ac FOR 1 minute
 Operating Temperature: -40C to + 105C

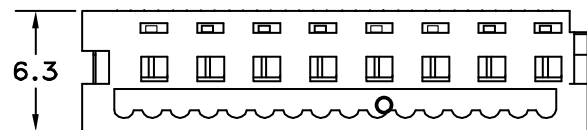

POSITION	A	B
4	7.59	3.81
6	10.13	6.35
8	12.67	8.89
10	15.21	11.43
12	17.75	13.97
14	20.39	16.51
16	22.83	19.05
18	25.37	21.59
20	27.91	24.13
26	35.53	31.75

MORETHANALL
 CONNECTORS
 ASSEMBLIES

煜倫有限公司

PART NO. PF-SF-xx

DWG NO. PF-SF-xx

FILE NO.

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ±0.3
 .XX ±0.2
 .XXX ±0.1
 AWG

DESCRIPTION:

DONCO CONNECTOR (FEMALE ON WIRE TYPE) 2.54mm

AREA

REVISIONS

HK

DATE