


**MATERIALS:**

- (1) HOUSING:  
HI.-TEMP. PLASTIC (94V-0)
- (2) CONTACT:  
COPPER ALLOY (t=0.2mm)  
PLATING GOLD OVER NICKEL

**SPECIFICATION:**

- (1) CURRENT RATING: 0.5A MAX.
- (2) INSULATION RESISTANCE:  
1000MΩ MIN AT 500V DC.
- (3) DIELECTRIC WITHSTANDING VOLTAGE:  
150V(r.m.s) AC AT 0.5mA FOR 1 MINUTE
- (4) CONTACT RESISTANCE: 50mΩ MAX.
- (5) OPERATING TEMPERATURE:  
-40°C~+105°C
- (6) MAX. PROCESSING TEMP:  
230°C FOR 30-60 SECONDS

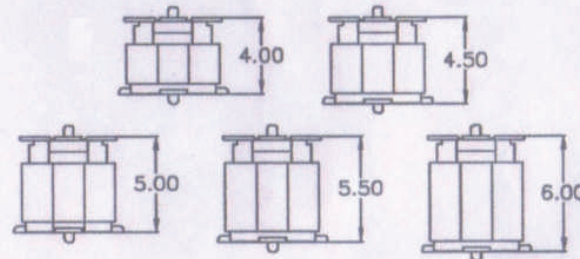

STACKED HEIGHT		PART NO.	H
3.5mm	FEMALE	NP0526-S14A-xxx	0.90
	MALE	NP0526-P21A-xxx	2.30
4.0mm	FEMALE	NP0526-S14A-xxx	1.40
	MALE	NP0526-P26A-xxx	2.60
4.5mm	FEMALE	NP0526-S14A-xxx	1.40
	MALE	NP0526-P31A-xxx	3.10
5.0mm	FEMALE	NP0526-S14A-xxx	1.40
	MALE	NP0526-P36A-xxx	3.60
5.5mm	FEMALE	NP0526-S14A-xxx	1.40
	MALE	NP0526-P41A-xxx	4.10
6.0mm	FEMALE	NP0526-S14A-xxx	1.40
	MALE	NP0526-P46A-xxx	4.60

Number Of Position	A	B	C	D
10	2.00	5.00	4.00	2.50
12	2.50	5.50	4.50	3.00
14	3.00	6.00	5.00	3.50
16	3.50	6.50	5.50	4.00
18	4.00	7.00	6.00	4.50
20	4.50	7.50	6.50	5.00
22	5.00	8.00	7.00	5.50
24	5.50	8.50	7.50	6.00
26	6.00	9.00	8.00	6.50
28	6.50	9.50	8.50	7.00
30	7.00	10.00	9.00	7.50
32	7.50	10.50	9.50	8.00
34	8.00	11.00	10.00	8.50
36	8.50	11.50	10.50	9.00
38	9.00	12.00	11.00	9.50
40	9.50	12.50	11.50	10.00
42	10.00	13.00	12.00	10.50
44	10.50	13.50	12.50	11.00
46	11.00	14.00	13.00	11.50
48	11.50	14.50	13.50	12.00
50	12.00	15.00	14.00	12.50
52	12.50	15.50	14.50	13.00
54	13.00	16.00	15.00	13.50
56	13.50	16.50	15.50	14.00
58	14.00	17.00	16.00	14.50
60	14.50	17.50	16.50	15.00
62	15.00	18.00	17.00	15.50
64	15.50	18.50	17.50	16.00
66	16.00	19.00	18.00	16.50
68	16.50	19.50	18.50	17.00
70	17.00	20.00	19.00	17.50
72	17.50	20.50	19.50	18.00
74	18.00	21.00	20.00	18.50
76	18.50	21.50	20.50	19.00
78	19.00	22.00	21.00	19.50
80	19.50	22.50	21.50	20.00
82	20.00	23.00	22.00	20.50
84	20.50	23.50	22.50	21.00
86	21.00	24.00	23.00	21.50
88	21.50	24.50	23.50	22.00
90	22.00	25.00	24.00	22.50
92	22.50	25.50	24.50	23.00
94	23.00	26.00	25.00	23.50
96	23.50	26.50	25.50	24.00
98	24.00	27.00	26.00	24.50
100	24.50	27.50	26.50	25.00

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm


SCALE 1:1

DATE


SIZE A4

P PROJECTION

X ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ±  
ANG ±



**ORDER INFORMATION**

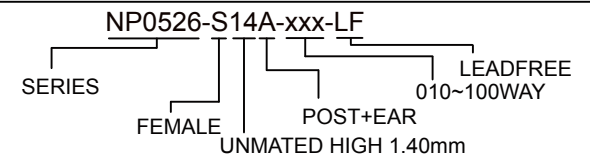

DESCRIPTION: