

3P~12P

2P

SPECIFICATIONS

Current Rating: 5A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66,UL94V-2

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
MIF-SH-1X02	3.00	6.80
MIF-SH-1X03	6.00	9.80
MIF-SH-1X04	9.00	12.80
MIF-SH-1X05	12.00	15.80
MIF-SH-1X06	15.00	18.80
MIF-SH-1X07	18.00	21.80
MIF-SH-1X08	21.00	24.80
MIF-SH-1X09	24.00	27.80
MIF-SH-1X10	27.00	30.80
MIF-SH-1X11	30.00	33.80
MIF-SH-1X12	33.00	36.80

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1:1

DATE


SIZE A4

PROJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

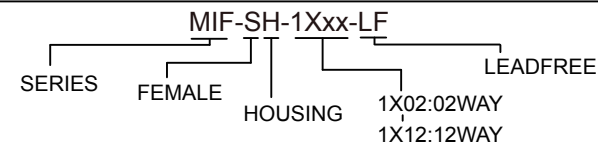

DESCRIPTION: 3.00mm PITCH HOUSING-RECEPTACLE, SINGLE ROW, MICRO-FIT