

PS-SE-3Xxx-LF
LEADFREE

RoHS Compliant

Specifications:

Current rating:5.0 AC/DC

Voltage rating:250V AC/DC

Contact resistance:20m ohm. max.

Insulator resistance:1000M ohm. Min.













Withstanding voltage:1500V AC for one minute

Operating temperature range:-25°C to + 105°C

Application wire:AWG#26 TO #18

Material and Finish:

Insulator:high Temp. Plastic(UL94V-2)

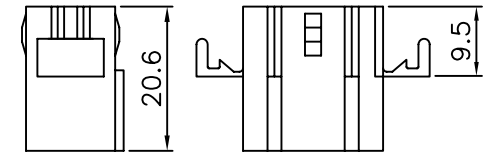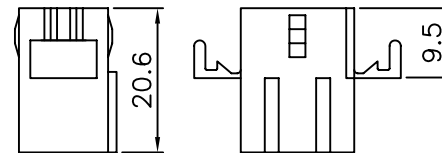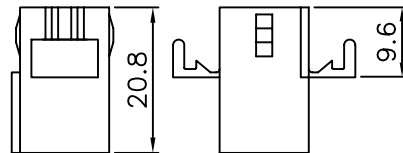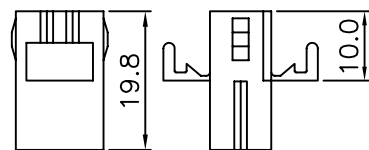

PS-SE-3X02

PS-SE-3X03

PS-SE-3X04

PS-SE-3X05



PART NO. PS-SE-3Xxx

DWG NO. PS-SE-3Xxx

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X±0.2

.XX±

.XXX±

AWG

DESCRIPTION:

Plug Housing With Ear

AREA

REVISIONS

HK

DATE

焯倫股份有限公司