

1 2 3 4 5 6 7 8 9 0

J

I

H

G

F



E

D

C

B

A

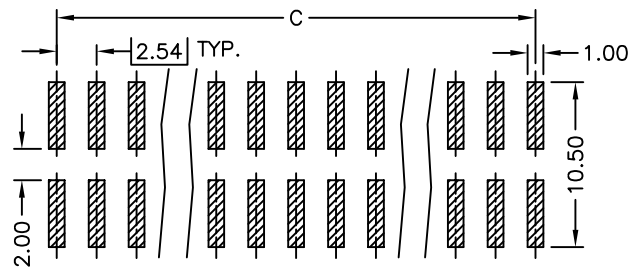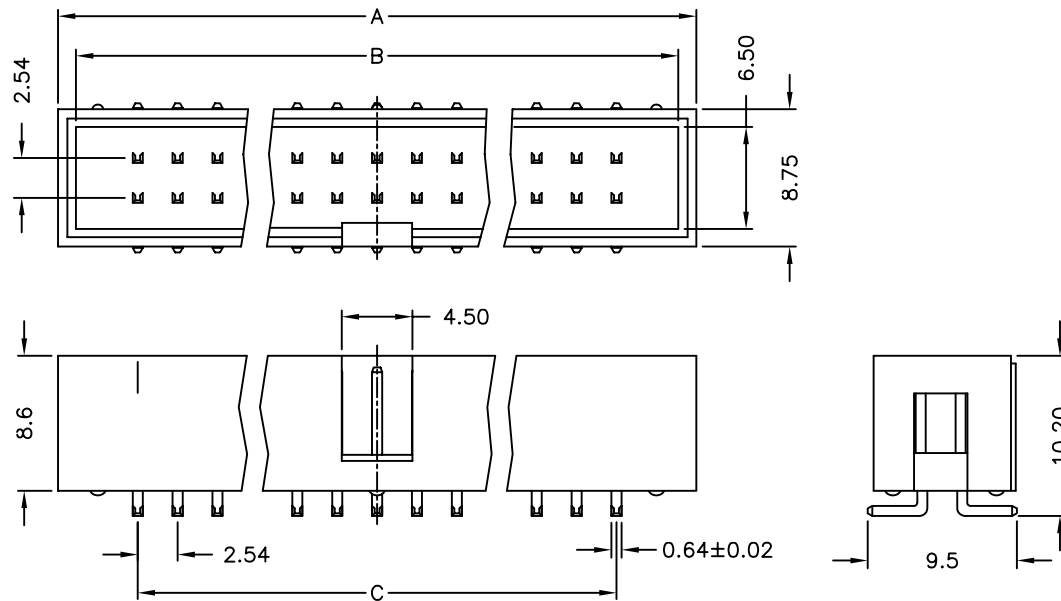

RECOMMEND P.C.B. LAYOUT
TOP VIEW

MATERIALS

1. HOUSING : NYLON 6T (UL 94V-0), BLACK.
2. TERMINAL : S.Q. 0.64mm BRASS, GOLD PLATING.

SPECIFICATION

1. CURRENT RATING : 3 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 5000M OHMS MIN. AT 1000V DC.
4. OPERATING TEMPERATURE : -55°C TO +105°C.
5. MAX. PROCESSING TEMPERATURE : 230°C FOR 30 ~ 60 SECONDS.

B-V-xx-LF

LEADFREE

RoHS Compliant

NUMBER OF POSITION	DIMENSIONS			NUMBER OF POSITION	DIMENSIONS		
	A	B	C		A	B	C
6	15.24	12.94	5.08	26	40.64	38.34	30.48
8	17.78	15.48	7.62	30	45.72	43.42	35.56
10	20.32	18.02	12.70	34	50.80	48.50	40.64
12	22.86	20.56	15.24	40	58.42	56.12	48.26
14	25.40	23.10	15.24	44	63.50	61.20	53.34
16	27.94	25.64	17.78	50	71.12	68.82	60.96
20	33.02	30.72	22.86	60	83.82	81.52	73.66
24	38.10	35.80	27.94	64	88.90	86.60	78.74



PART NO. **B-V-xx**

DWG NO. **B-V-xx**

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

- .X ± 0.2
- .XX ±
- .XXX ±
- AWG

DESCRIPTION: 2.54mm SHROUDED HEADER SMT

AREA

REVISIONS

HK

DATE

煜倫股份有限公司