


RECOMMENDED P.C.B. LAYOUT  
TOLERANCE ±0.05  
TOP VIEW

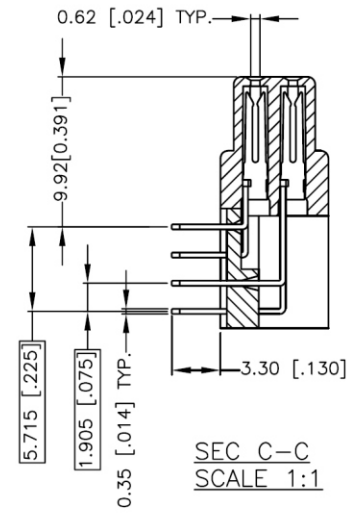

**MATERIALS**

1. HOUSING : THERMOPLASTIC (UL94V-0) BLACK
2. TERMINAL : COPPER ALLOY  
GOLD PLASH ON CONTACT AREA  
TIN PLATED ON SOLDER TAILS.  
UNDER NICKEL PLATED . (t=0.35mm)

**SPECIFICATION**

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE :  
500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN.  
AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -40°C TO +85°C.

**HPDP-SR-068-LF**  
**LEADFREE**  
**RoHS Compliant**



PART NO. **HPDP-SR-068**

DWG NO. **HPDP-SR-068**

FILE NO.

CHECKED BY CY

DRAWING BY

TOLERANCES ARE  
.X ± 0.2  
.XX ±  
.XXX ±  
AWG

DESCRIPTION:

UNIT / mm

SCALE 1:1

PROJECTION

AREA	REVISIONS	HK	DATE
------	-----------	----	------

焯倫股份有限公司