


TOLERANCE: ±0.05
RECOMMENDED P.C. BOARD LAYOUT

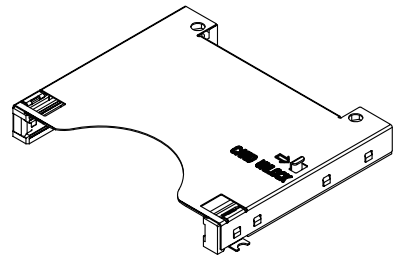

- NOTES:
- MATERIAL:
 - 1-1 Housing : Engineering plastic , LCP with G.F reinforced , black per UL 94V-0 rate.
 - 1-2 Terminal : Phosphor Bronze , per JIS 5210 , 0.2t
 - 1-3 Metal cover : Stainless steel sheet SUS304 0.2t.
 - PLATING:
 - Contact area: 0.254 μm (10 μ" minimum) or 0.762 μm (30 μ") gold plating
 - Solder zone: 2.54 μm (100 μ") matte Tin 1.27 μm (50 μ") min. Nickel underplating over all.
 - RoHS compliant products.
 - OPERATING TEMPERATURE: -40°C~+85°C

- CONTACT TYPE: Male
- CONTACT NUMBER: 24
- SHELL MATERIAL: Stainless steel 6.05H LOCK
- SOLDER TAILS AREA PLATING: TIN


RoHS Compliant

TOLERANCES ARE


MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1 : 1
DATE
SIZE A4

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ±
PROJECTION



ORDER INFORMATION

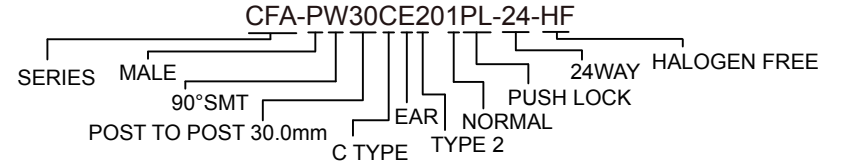

DESCRIPTION: CFAST HOST CONNECTOR LOCK TYPE II.