
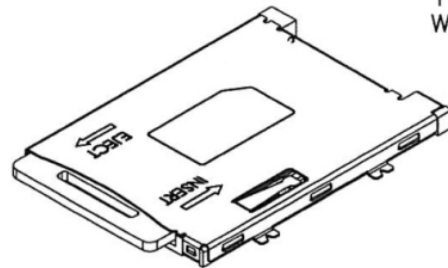
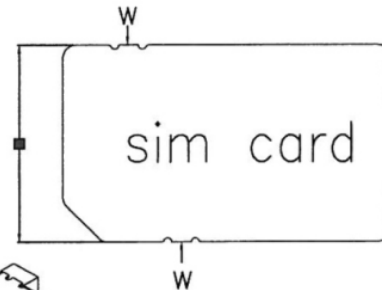
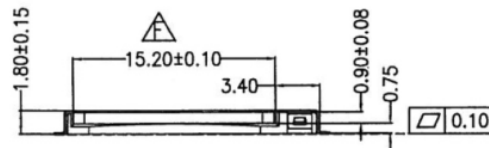


插卡示意圖

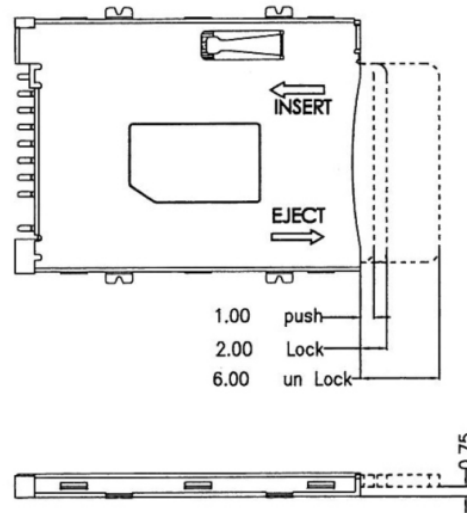

## Specification

### Material:

Housing: High Temperature Thermoplastic  
 Color Black UL 94V-0  
 Contacts: Phosphor Bronze  
 Shell: stainless steel

### Plating:

Contacts: Plated 50 u" Ni Overall  
 Plated Au Selective Contact Area  
 Plated 100 u" Sn Over Nickel On Solder Area

### Specification:

Current Rating :0.5A MAX.  
 Contact Resistance:100mΩ max  
 Insulation Resistance:1000MΩ min.500VDC  
 Dielectric Withstanding Voltage:500VAC/minute  
 Operating Temperature:-25° C to+85° C  
 Mating Cycles:7000 Insertions

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±

PPOJECTION



ORDER INFORMATION



SCP-W19EA-08-LF  
 SERIES | | | | LEADFREE  
 | | | | 08 WAY  
 | | | | CLOSED SWITCH  
 90°SMT | | | | EAR  
 | | | | PAD TO PAD 19.3mm

煜倫股份有限公司


www.morethanall.com

DESCRIPTION:

RECOMMEND PCB LAYOUT(general dimension .x±0.15mm  
.XX±0.05mm.xxx±0.02mm)Thickness(1.5mm±0.05)

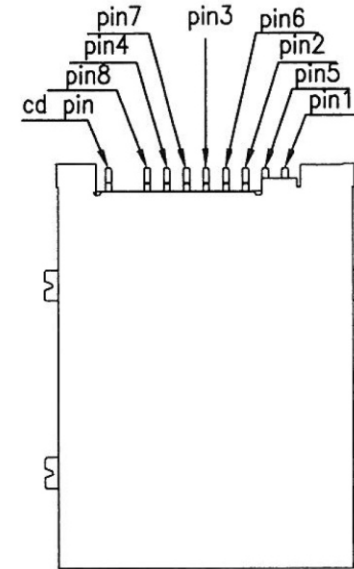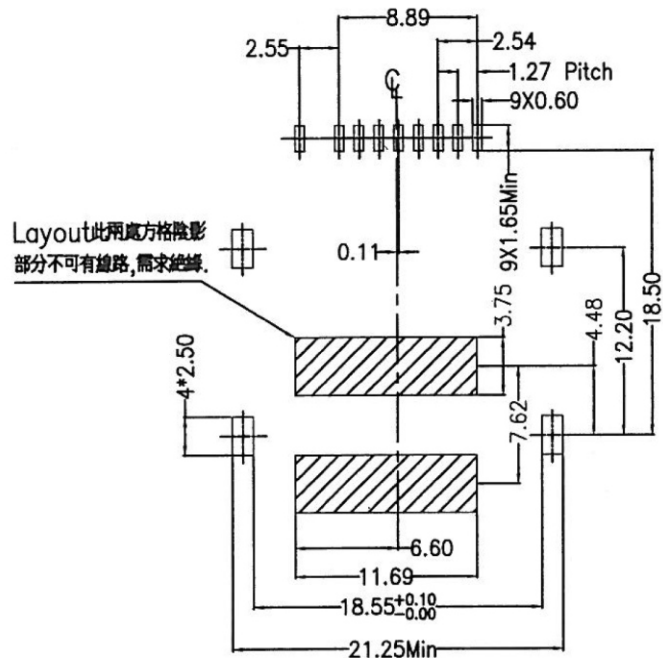

Pin Assignment:	
SIM #1	SIM VCC
SIM #2	SIM RST
SIM #3	SIM CLK
SIM #4	SIM Reserve
SIM #5	SIM GND
SIM #6	SIM VPP
SIM #7	SIM I/O
SIM #8	SIM Reserve

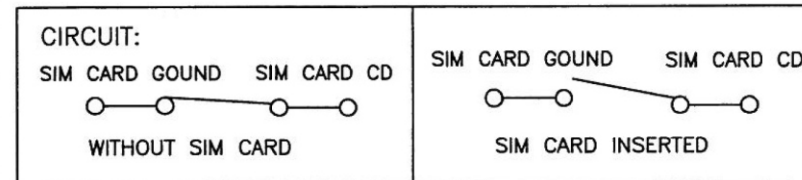

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES  
煜倫股份有限公司


www.morethanall.com

RoHS Compliant

DRAWING BY CY  
CHECKED BY GENIUS  
UNIT / mm    SCALE 1 : 1  
DATE  
SIZE A4    PPROJECTION

TOLERANCES ARE

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



ORDER INFORMATION

SCP-W19EA-08-LF  
SERIES | | | | LEADFREE  
| | | | 08 WAY  
| | | | CLOSED SWITCH  
90°SMT    EAR  
PAD TO PAD 19.3mm

DESCRIPTION: