


SECTION:A-A

NOTE:
 MATERIAL:
 HOUSING:THERMOPLASTIC(NYLON+GF)
 CONTACT:BRASS
 PLATING:
 CONTACT: GOLD PLATING
 SPECIFICATION:
 VOLTAGE RATING: 50V
 CURRENT RATING: 1.1A
 CONTACT RESISTANCE TERMINAL:20mΩ MAX
 DIELECTRIC WITHSTANDING VOLTAGE:500V AC
 INSULATION RESISTANCE:1000MΩ MIN

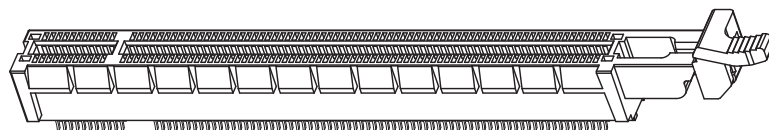

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm


SCALE 1:1

DATE

SIZE A4


PJECTION

X, ±
 .X ± 0.30
 .XX ± 0.15
 .XXX ± 0.10
 ANG ±



ORDER INFORMATION

PCIX-ELP-164-LF

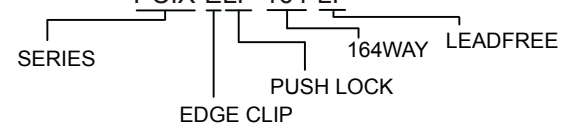

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: