
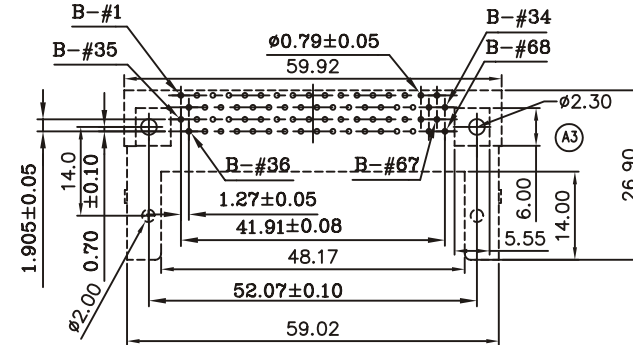

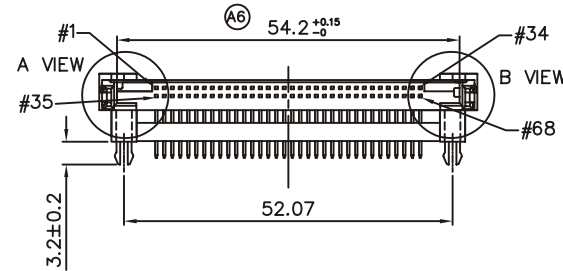
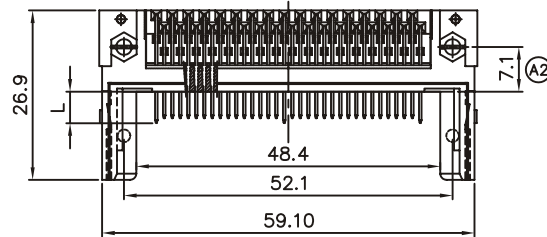
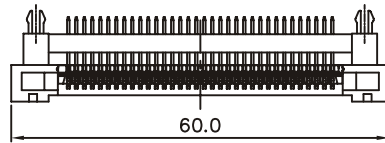


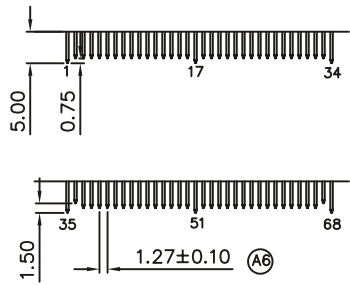

P.C. Board Layout

H	Dimension
00	0.00mm
20	2.00mm
28	2.80mm
40	4.00mm
50	5.00mm
80	8.00mm
22	2.20mm

Material:

Housing: 30% Glass filled LCP UL94V-0.
Contacts: Brass.

Electrical Characteristics:

Current Rating: 0.5 AMP.


Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩmin. at DC 500V.


Contact Resistance: 30mΩmax. at DC 100mA.

Operating Temperature: -55°C~+105°C.


TYPE	CONTACT NO.	L
DETECT	36 ,67	3.5
GENERAL	OTHERS	4.25
POWER	1,17,34,35,51,68	5.0



A VIEW
S=2/1
FOR 3.3 V



A VIEW
S=2/1
FOR 5.0 V



B VIEW
S=2/1

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.30

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20


DATE

.XXX ± 0.10

ANG ± 1°

SIZE A4

PPOJECTION



ORDER INFORMATION

PCC-PRxxVxZ-68-LF

SERIES LEADFREE

MALE CLIP 68 WAY

DIP 90° V3:3.3V

V5:5.0V

00,20,28,40,50,80,22 mm HIGH

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: